



## Review article

## Nature-inspired algorithms for Wireless Sensor Networks: A comprehensive survey

Abhilash Singh <sup>a</sup>, Sandeep Sharma <sup>b,\*</sup>, Jitendra Singh <sup>c</sup><sup>a</sup> *Fluvial Geomorphology and Remote Sensing Laboratory, Indian Institute of Science Education and Research Bhopal, India*<sup>b</sup> *School of ICT, Gautam Buddha University, Greater Noida, India*<sup>c</sup> *Department of Electrical Engineering, Indian Institute of Technology Kanpur, India*

## ARTICLE INFO

## Article history:

Received 3 July 2020

Received in revised form 20 November 2020

Accepted 1 December 2020

Available online 23 December 2020

## Keywords:

Optimal coverage

Bio-inspired algorithm

Lion Optimization

WSNs

## ABSTRACT

In order to solve the critical issues in Wireless Sensor Networks (WSNs), with concern for limited sensor lifetime, nature-inspired algorithms are emerging as a suitable method. Getting optimal network coverage is one of those challenging issues that need to be examined critically before any network setup. Optimal network coverage not only minimizes the consumption of limited energy of battery-driven sensors but also reduce the sensing of redundant information. In this paper, we focus on nature-inspired optimization algorithms concerning the optimal coverage in WSNs. In the first half of the paper, we have briefly discussed the taxonomy of the optimization algorithms along with the problem domains in WSNs. In the second half of the paper, we have compared the performance of two nature-inspired algorithms for getting optimal coverage in WSNs. The first one is a combined Improved Genetic Algorithm and Binary Ant Colony Algorithm (IGA-BACA), and the second one is Lion Optimization (LO). The simulation results confirm that LO gives better network coverage, and the convergence rate of LO is faster than that of IGA-BACA. Further, we observed that the optimal coverage is achieved at a lesser number of generations in LO as compared to IGA-BACA. This review will help researchers to explore the applications in this field as well as beyond this area.

© 2020 Elsevier Inc. All rights reserved.

## Contents

1. Introduction.....	2
2. WSNs and optimizations .....	2
2.1. Problem domains in WSNs.....	3
2.1.1. Optimal coverage in WSNs .....	4
2.1.2. Data aggregation in WSNs .....	4
2.1.3. Energy efficient clustering and routing in WSNs.....	4
2.1.4. Sensor localization in WSNs .....	4
2.2. Optimization in WSNs.....	5
3. Theoretical background of the leading algorithms in WSNs arena.....	6
3.1. Mathematical foundation of the nature-inspired algorithms.....	6
3.2. Particle swarm optimization (PSO).....	7
3.3. GA and adaptive GA (or IGA).....	8
3.4. ACO and BACA.....	8
3.5. IGA with BACA .....	9
3.6. LO.....	9
4. Solution to the problem domains and present status .....	9
4.1. Applications of PSO in WSNs .....	9
4.1.1. For optimal coverage using PSO.....	9
4.1.2. For sensor localization using PSO .....	11
4.1.3. For energy efficient clustering and routing using PSO .....	11
4.1.4. For data aggregation using PSO.....	11

\* Corresponding author.

E-mail address: [sandeepsharma@gbu.ac.in](mailto:sandeepsharma@gbu.ac.in) (S. Sharma).

4.2. Applications of GA in WSNs.....	11
4.2.1. For optimal coverage using GA .....	11
4.2.2. For sensor localization using GA .....	11
4.2.3. For energy efficient clustering and routing using GA .....	11
4.2.4. For data aggregation using GA .....	11
4.3. Applications of ACO in WSNs.....	14
4.3.1. For optimal coverage using ACO .....	14
4.3.2. For sensor localization using ACO .....	14
4.3.3. For energy efficient clustering and routing using ACO .....	14
4.3.4. For data aggregation using ACO .....	14
5. Optimal coverage using IGA-BACA and LO .....	14
5.1. Mapping from solution to coding space .....	14
5.2. Algorithm and process .....	14
6. System model .....	15
7. Simulation results .....	15
8. Conclusion .....	19
CRDiT authorship contribution statement .....	19
Declaration of competing interest .....	19
Acknowledgements .....	19
References .....	19

## 1. Introduction

Sensors in WSNs can sense, collect and transmit information together [1]. All these tasks need to be done effectively in order to minimize the wastage of limited sensor battery lifetime. We cannot increase the sensor lifetime by supplying external or additional energy because most of the sensors are deployed in hard-to-reach areas [2–10]. Much work has been done to increase the lifetime of the sensor node. Liang et al. [11], have proposed, Huang algorithm, an optimal energy clustering algorithm to ensure balanced depletion of energy over the whole network which prolongs the lifetime of the system. Cardei et al. [12], have proposed TianD algorithm, to extend the operational time of the sensors by arranging them into several maximal disjoint set covers that are activated successively. However, there exist some limitations in the above-listed algorithms. Huang algorithm is highly complex, and if data for communication is large, then it may block the channel. In contrast, the complexity of TianD algorithm is lower. However, it is unable to point out the redundant node, which is sensing redundant information.

In addition to the energy constraint, accurate sensing, and non-redundant information is a critical challenge in WSNs. In order to sense non-redundant information, the sensors need to be placed apart at a sufficient distance from each other so that the overlapping in the sensing region is minimum. However, if the sensors are placed at a more considerable distance away from each other, then it will create uncovered areas which are termed as coverage hole or blind areas. To ensure guaranteed coverage, Wang et al. [13], proposed a Coverage Configuration Protocol (CCP) which guaranteed coverage and connectivity with self-configuration for a wide range of applications. However, the CCP algorithm gives underperformance if the numbers of sensors are significant.



After critically analysing the problem of energy constraint and sensor node separation (*i.e.*, node placement), we observed that there exist a trade-off between these two problems. In literature, researchers have proposed individual solutions to each problem of energy constraint and node placement but not collectively. Keeping in view the limitations of the above-proposed solutions and instead considering the problem individually, we have combined these two problems as a multi-objective optimization problem. To balance this trade-off, we need to optimize the multi-objective optimization problem. After successful optimization, we can achieve optimal coverage with less number of sensor nodes.

Several reviews are published in context to use of nature-inspired algorithms in WSNs [14–18]. However, only a few cover the optimal coverage aspect in WSNs [19–21]. In [19], they discussed the various issues that are generally encountered while using a nature-inspired algorithm-based optimization technique for sensor deployment that leads to the optimal coverage. Whereas in [20], they compared three algorithms namely, standard Multi-Objective Evolutionary Algorithm (MOEA), Non-dominated Sorting Genetic Algorithm (NSGA-II) and Indicator-Based Evolutionary Algorithms for optimal coverage in WSNs. Recently, [21] efficiently discussed the theoretical, mathematical and practical application of nature-inspired algorithms in WSNs. They discussed the genetic algorithm, evolutionary differential algorithm, NSGA and genetic programming in-depth for routing, clustering, coverage and localization in WSNs. Nevertheless, none of them provides a critical review of the problem domains in WSNs and in particular of the optimal coverage. In this paper, firstly, we have briefly discussed the nature-inspired algorithms and their application in WSNs. We have also discussed the advantages and disadvantages of the work done by various researchers. Later, we have compared the performance of two such algorithms for the optimization of a multi-objective optimization problem stated above. The first algorithm is IGA-BACA [22–25]. It is a hybrid of the modified evolutionary and swarm-based nature-inspired algorithm. In contrast, the second one is LO [26], which is a purely swarm-based nature-inspired algorithm.

The rest of the paper is organized as follows. In Section 2, we have discussed the WSN's problem domains that consist of the critical issues of the WSNs by categorizing it into four categories which are followed by a brief discussion of the taxonomy of some of the prominent optimization algorithms. Further, in Section 3, we have briefly discussed the theoretical and mathematical aspect of some nature-inspired algorithms. Furthermore, in Section 4, we have discussed the solutions to the problem domains of WSNs. Afterwards, in Section 5, we have discussed the optimal coverage aspect in detail with respect to nature-inspired algorithms. Then, we have presented the system model in Section 6. After that, we have presented the simulation results in Section 7. Lastly, in Section 8, we have presented the conclusion and the future scope of the work. For better readability, the outline of the paper is shown in Fig. 1.

## 2. WSNs and optimizations

The critical issues in WSNs can be broadly classified into three, namely energy efficiency, Quality of Service (QoS) and security.

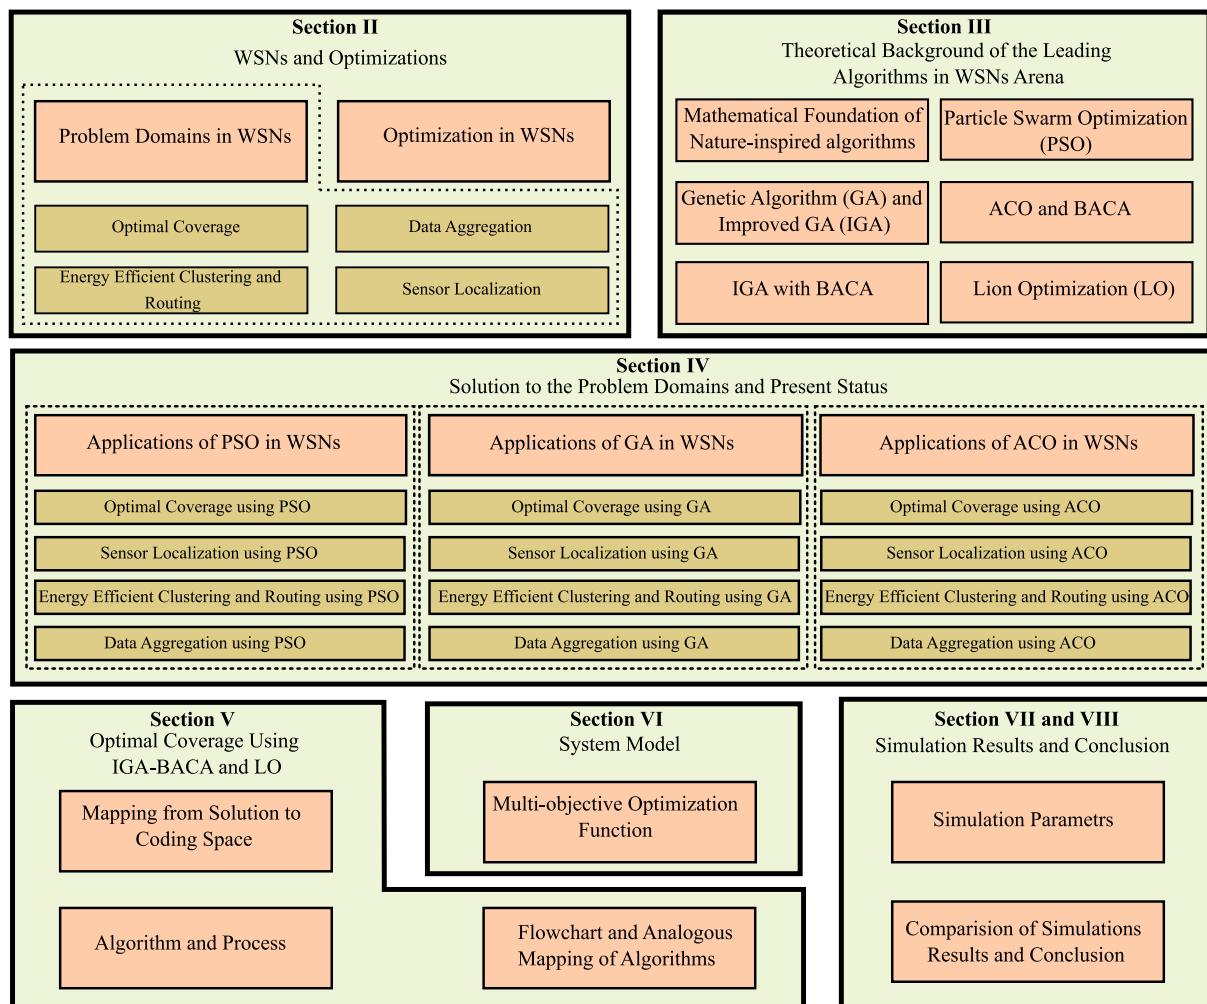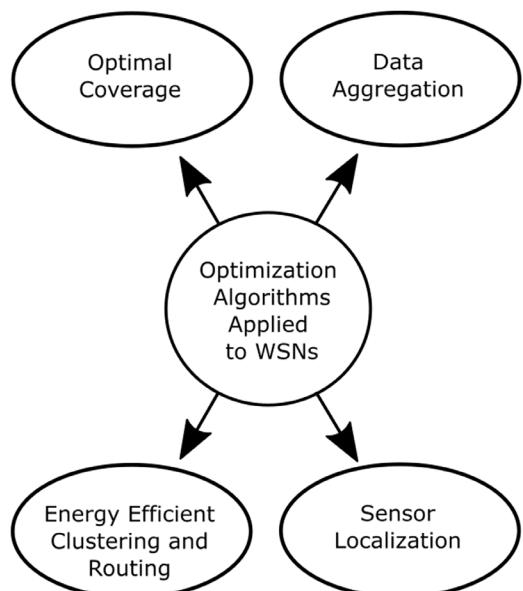**Fig. 1.** Organization of the paper.**Fig. 2.** Problem domains of WSNs.


There exist a trade-off between all these issues. For example, if we want good QoS, then we have to compromise with the network lifetime. Same follows with the security parameters. A significant amount of work has been done concerning addressing these issues individually. However, many loopholes exist when addressing these issues individually. So, to develop a better WSNs, we need to optimize these issues simultaneously. One way of doing this is to develop a multi-objective function and optimize it by using a suitable optimizer or algorithm. The selection of suitable algorithm depends upon various factors such as the behaviour of the algorithm, type of problem, time constraint, resource availability, and desired accuracy. We have first discussed the problem domains in WSNs and then review the optimizations techniques that are available to date to solve it.

### 2.1. Problem domains in WSNs

We have reviewed the potential of optimization and focused on the different areas in WSNs, as shown in Fig. 2.

- Optimal Coverage in WSNs
- Data Aggregation in WSNs
- Energy Efficient Clustering and Routing in WSNs
- Sensor Localization in WSNs

We have first briefly discussed each of these problem domains followed by the work done to solve these issues using optimizations in Section 4.

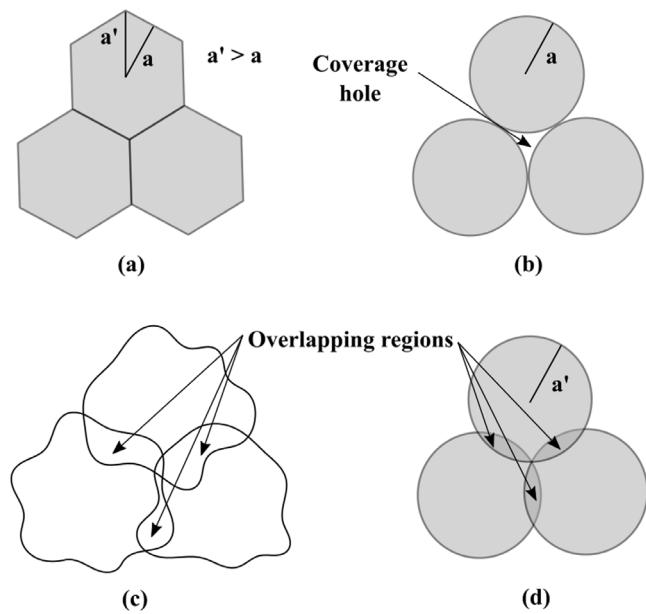

**Fig. 3.** Coverage: (a) Hexagonal shape-based, (b) Circular shape-based ( $\text{radius} = a$ ), (c) Real time-based (irregular) and (d) Circular shape-based ( $\text{radius} = a'$ ).

### 2.1.1. Optimal coverage in WSNs

Coverage is necessary and hence becomes an essential topic in the study of WSNs. The coverage in a given target area is defined as finding a set of sensors for covering the given area or all the target points. Optimal coverage means covering the entire area or all the targets point with a minimum number of sensors.

One of the crucial parameters in the coverage of a sensor in WSNs is the shape of the sensing area. In Fig. 3(a) - (d), we present four two-dimensional geometrical-based sensing shapes. In real life, the shape of the sensing area is irregular and complex due to the terrain features and solid structures. The Fig. 3(c), represents a typical example of real-life sensing shape of a sensor. However, for computational and conceptual ease, we often adopt either a hexagonal shape or a circular shape. The hexagonal shape is often applied for analysis in the WSNs because of its flexibility and no overlapping, as illustrated in Fig. 3(a). However, because of the low complexity, the circular shape is more popular. The limitation associated with the circular shape is that it creates a coverage hole, as illustrated in Fig. 3(b). This limitation is compensated by increasing the radius of the circle, as illustrated in Fig. 3(d). However, this gives birth to a new issue of overlapping regions. These overlapping regions lead to the sensing of redundant information and wastage of the limited sensor battery. However, if we critically compared all the three possibilities with the real-life sensing shape, then Fig. 3(d), comes out to be the representative of Fig. 3(c).

The only challenging issue in this problem domain is the reduction of these overlapping sensing regions with no coverage hole. The more the overlapping area, the more redundant information will be sensed by the sensors and hence more will be the wastage of the limited battery of the sensors. One way of minimizing this redundancy is to optimize the sensor node placement, which is a single-objective optimization problem. We can extend the single objective to multi-objective by considering the other network parameters.

### 2.1.2. Data aggregation in WSNs

The second way of minimizing the sensing of redundant information is data aggregation. It is an energy-efficient technique

in WSNs. While monitoring an area, sensors collect local information and send it either the complete processed data or partially processed data to the data aggregation centre. According to the data received, the data aggregation centre takes a specific decision to improve the lifetime of the sensors by eliminating the sensing of overlap or common regions.

We can broadly classify the data aggregation techniques into four, i.e., Tree-based, Cluster-based, Grid-based and Chain based. All four types have been illustrated in Fig. 4(a) - (d). The Tree-based data aggregation technique is based on tree architecture in which the source node act as coordinator, and the data aggregation takes place at the intermediate nodes known as the aggregator node. The lower level nodes forward the information to the upper-level nodes. The Cluster-based aggregation technique is based on clustering architecture. In this type of data aggregation, the network is first divided into several clusters followed by Cluster Head (CH) selection based on sensor parameters such as sensor energy, etc. The CH first aggregates the data locally within the clusters, and then the aggregated data is sent to the sink. For each new round of data transmission, a new CH is selected to avoid excess energy consumption from the CH. In the Grid-based aggregation technique, the network is first divided into several areas, and every area reports the occurrence of any new event. The data aggregation take place at the grid aggregator node, also known as the central node. In the Chain based aggregation technique, the sensor node transfer the data to its neighbouring node and the data aggregation take place at the lead.

The main challenging issues in this problem domain are

- To address the problem of optimal power allocation.
- Finding minimum no. of aggregation points while routing data.
- Perform consistency for large scale and dynamic WSNs.

### 2.1.3. Energy efficient clustering and routing in WSNs


Due to the limited energy supply in sensors, the need for energy-efficient infrastructure is of utmost importance. Most of the sensor energy is consumed in the transmission of the sensed data. The energy required for the data transmission increases exponentially with the transmission length. Due to which the data transmission in sensors follows multi-hop communication. Routing in WSNs is referred to as the path traversed by the data packets to reach the sink from the source node. First, the sensors are clustered into groups. Then a CH is selected for each group which collects all the data from the non-CH sensors. Subsequently, the collected data is transmitted to the sink using optimal routing techniques.

The main challenging issues in this problem domain are


- Selection of high energy CHs and an optimal routing path in each round.
- Maximization of the data delivered and the network lifetime.
- Communication distance minimization.

### 2.1.4. Sensor localization in WSNs

Sensor localization is the process of calculating the location of the sensor present in a network. It consists of two phases. The first one is the distance estimation, and the second one is the position calculation, as illustrated in Fig. 5. The anchor or beacon node is the node with known location either through Global Positioning System (GPS) or by manual pre-programming during deployment. During the first phase, the relative distance between the anchor and the unknown node is estimated. The coordinates of the unknown node concerning the anchor nodes are

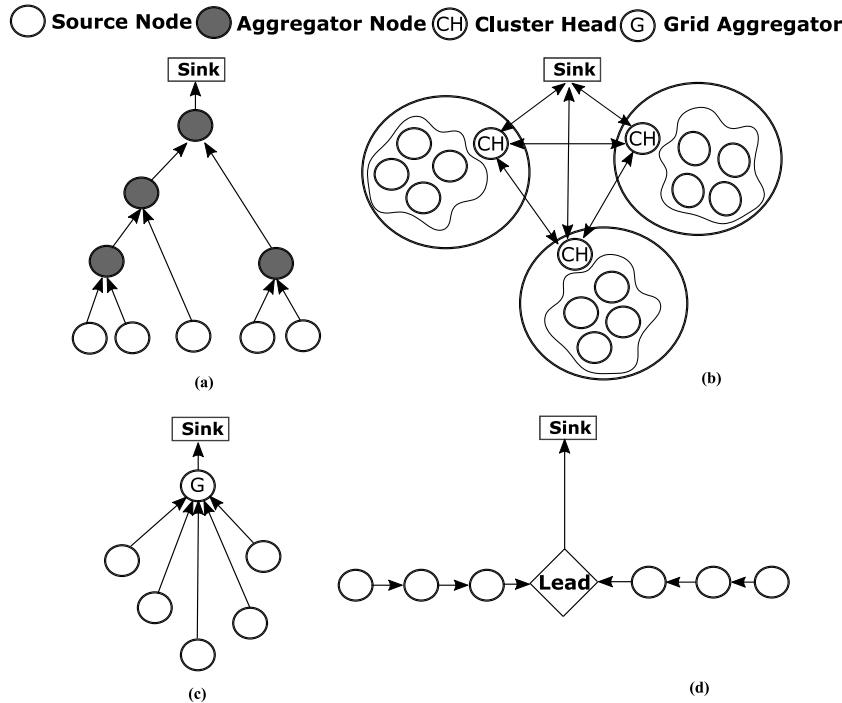

**Fig. 4.** Types of Data aggregations: (a) Tree-based, (b) Cluster-based, (c) Grid-based and (d) Chain based.

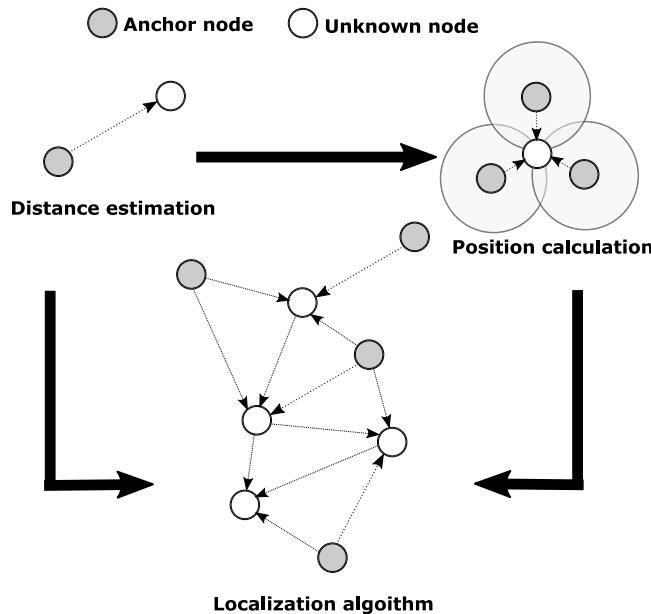

**Fig. 5.** Working of the localization system.

calculated in the second phase using this gathered information. In order to localize the other nodes in the WSNs, the available information of distances and positions are manipulated by using various localization algorithms. A details study of such algorithms can be found in [27].

The main challenging issues in this problem domain are


- Minimization of the localization error.
- Increasing the accuracy of the unknown node location.

## 2.2. Optimization in WSNs

An optimization can be done by a model, or by a simulator or by an algorithm. In this paper, we have evaluated the potential of optimization of the problem domains in WSNs based on algorithm approach. A detailed taxonomy of the optimization algorithms that are frequently used in WSNs is shown in Fig. 6. However, there exist more than 100 nature-inspired algorithms since 2000. Hence, it is not possible to list all the existing algorithms in one taxonomy. For example, Xing and Gao [28] have listed 134 such algorithms and an online repository *Bestiary* list more than 200 algorithms [29]. The most recent and complete taxonomies or databases of the nature-inspired algorithms can be found in [30].

The optimization algorithms are classified into deterministic (local search) and stochastic (global search). In deterministic methods, we have a theoretical guarantee of reaching the global minimum or at least to a local minimum, whereas stochastic methods only provide a guarantee in terms of probability. However, stochastic methods are faster as compared to the deterministic one. Moreover, stochastic methods are suitable for black-box formation and ill-behaved functions. In contrast to stochastic methods, the deterministic method mostly relies on the theoretical assumptions about the problem formulation and also on its analytical properties.

Further, the stochastic methods are classified into a heuristic and meta-heuristic algorithm. Both types of algorithms are used to increase the speed of the process of finding a global optimum for the cases where finding an optimal solution is difficult. Heuristics algorithms are problem-dependent algorithms. Due to its adaptiveness with the problem and greedy nature, they are highly prone to get stuck at local optima; resulting into failure of obtaining global optima. In contrast, meta-heuristics algorithms are problem-independent algorithms. The non-adaptive and non-greedy nature of these algorithms enables its use as a black box. These algorithms sometimes accept a temporary deterioration of the solution (e.g., simulated-annealing method) in order to get the global optima. The meta-heuristic algorithms

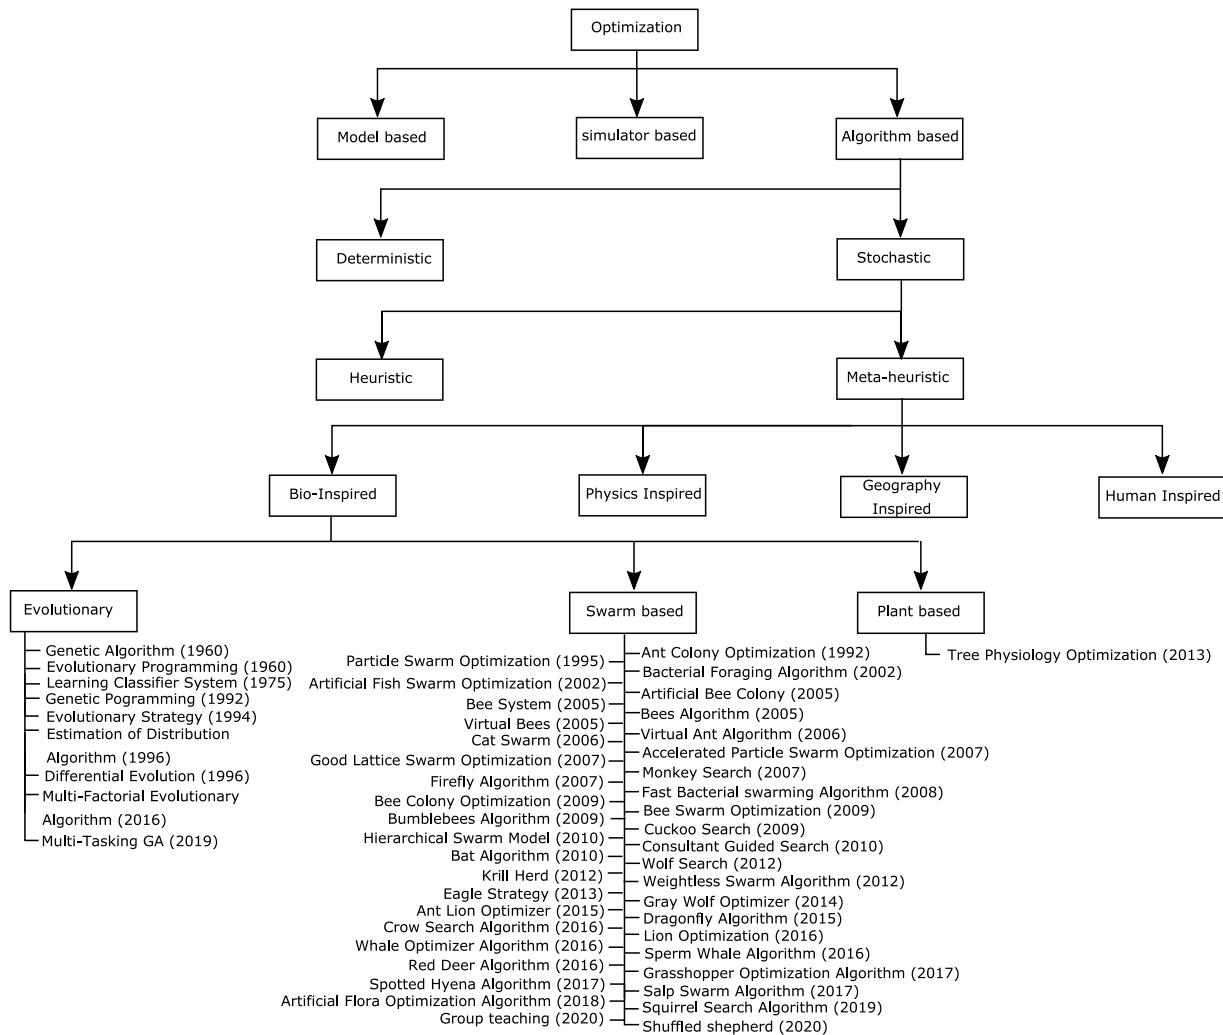

**Fig. 6.** Taxonomy of the optimization techniques.

are also known as nature-inspired algorithms, or intelligent optimization algorithms [31–33]. These algorithms are formulated by delineating inspiration from nature. The nature-inspired/meta-heuristic algorithms are further classified as bio-inspired, physics-inspired, geography inspired and human-inspired. The majority of the nature-inspired algorithms are inspired by the biological system. Hence, a big chunk of nature-inspired algorithms are bio-inspired (biology-inspired) (Fig. 7). The bio-inspired algorithms are further classified into three, namely evolutionary, swarm-based and plant-based. The evolutionary algorithms are based on the principle of evolution, such as Darwin's principle of selection, heredity and variation [34]. In contrast, swarm algorithms are based on the collective intelligence [35,36].

For representing the present status of these algorithms in context to WSNs, we have created a Venn diagram (Fig. 8) that illustrate the different regions of applications or problem domains. In Fig. 8, the region R 1, R 2, R 3 and R 4 represents the application area for optimal coverage, data aggregation, energy-efficient clustering and routing and sensor localization respectively. Also, the overlapping regions have combined regions of application (e.g., R 3 represents the application area that includes optimal coverage as well as data aggregation). Finally, Table 1 represents the current status of the bio-inspired algorithms in context to WSNs.

Not all the bio-inspired algorithms are of potential use in WSNs. The algorithms for any specific problems in WSNs arena

are selected based on the analogous parameters between the problem domain and the algorithm (e.g., Table 3) [37,38]. According to the previous studies (Table 1), only three algorithms (PSO, GA, and ACO) covers all the problem domains of WSNs (i.e. lies in region R 13). Hence, PSO, GA, ACO and their modifications such as IGA, BACA and IGA-BACA (combined meta-heuristic) are suitable for the optimizations of the problem domains in WSNs. In this study, we have evaluated the potential of the LO for optimal coverage in WSNs.

In the next section, we have tried to elaborate and give an insight into all these algorithms.

### 3. Theoretical background of the leading algorithms in WSNs arena

#### 3.1. Mathematical foundation of the nature-inspired algorithms

In this sub-section, we have discussed the generic mathematics of nature-inspired algorithms. In computational science, any optimization algorithm can mathematically analyse in terms of an iterative process. According to [174,175], any nature-inspired algorithm with  $k$  parameters,  $p = (p_1, \dots, p_k)$ , and  $m$  random variables,  $\epsilon = (\epsilon_1, \dots, \epsilon_m)$  for a single-agent trajectory-based system can be mathematically expressed as

$$x^{t+1} = \phi(x^t, p(t), \epsilon(t)) \quad (1)$$

**Table 1**  
Algorithms with region of application.

Algorithm	Region of application	Main references
GA [39]	R 13	[40–43]
Evolutionary programming [44]	R 4	[45]
Learning classifier system [46]	R 14	Not addressed
Genetic programming [47]	R 10	[48,49]
Evolutionary strategy [50]	R 10	[51,52]
Estimation of distribution algorithm [53,54]	R 12	[55,56]
Differential evolution [57]	R 12	[58–60]
Multi-factorial evolutionary algorithm [61]	R 2	[62]
Multi-tasking genetic algorithm [63]	R 14	Not addressed
ACO [64–67]	R 13	[68–71]
PSO [72–74]	R 13	[75–78]
Bacterial foraging algorithm [79–81]	R 12	[82–84]
Artificial fish swarm optimization [85,86]	R 12	[87–89]
Artificial bee colony [90–93]	R 12	[94–97]
Bee system [98,99]	R 14	Not addressed
Bees algorithm [100,101]	R 4	[102]
Virtual bees [103]	R 14	Not addressed
Virtual ant algorithm [104]	R 14	Not addressed
Cat swarm [105,106]	R 15	[107,108]
Accelerated particle swarm optimization [109]	R 14	Not addressed
Good lattice swarm optimization [110]	R 14	Not addressed
Monkey search [111]	R 3	[112]
Firefly algorithm [113–115]	R 12	[116–118]
Fast bacterial swarming algorithm [119]	R 14	Not addressed
Bee colony optimization [120]	R 2	[121]
Bee swarm optimization [122,123]	R 14	Not addressed
Bumblebees algorithm [124]	R 14	Not addressed
Cuckoo search [125–127]	R 11	[128–130]
Hierarchical swarm model [131]	R 14	Not addressed
Consultant guided search [132–134]	R 14	Not addressed
Bat algorithm [135]	R 12	[136–138]
Wolf search [139]	R 14	Not addressed
Krill herd [140]	R 15	[141,142]
Weightless swarm algorithm [143]	R 14	Not addressed
Eagle strategy [144]	R 14	Not addressed
Gray wolf optimizer [145,146]	R 12	[147–149]
Ant lion optimizer [150]	R 5	[151,152]
Dragonfly algorithm [153]	R 6	[154,155]
Crow search algorithm [156]	R 3	[157]
LO [26]	R 9	[151,158]
Whale optimizer algorithm [159]	R 12	[160–162]
Sperm whale algorithm [163]	R 14	Not addressed
Red deer algorithm [164]	R 14	Not addressed
Grasshopper optimization algorithm [165]	R 14	Not addressed
Spotted hyena algorithm [166]	R 14	Not addressed
Salp swarm algorithm [167]	R 10	[168,169]
Artificial flora optimization algorithm [170]	R 14	Not addressed
Squirrel search algorithm [171]	R 14	Not addressed
Shuffled shepherd algorithm [172]	R 14	Not addressed
Group teaching algorithm [173]	R 14	Not addressed

where,  $\phi$  represent the non-linear mapping from the current solution (at  $t$ ) to the better solution (at  $t + 1$ ).

For population based system with  $n$  swarm solution, Eq. (1) can be extended to


$$\begin{bmatrix} x_1 \\ x_2 \\ \vdots \\ x_n \end{bmatrix}^{t+1} = \phi \left( (x_1^t, x_2^t, \dots, x_n^t); (p_1, p_2, \dots, p_k); (\epsilon_1, \epsilon_2, \dots, \epsilon_m) \right) \times \begin{bmatrix} x_1 \\ x_2 \\ \vdots \\ x_n \end{bmatrix}^t \quad (2)$$

where,  $(p_1, p_2, \dots, p_k)$  represent algorithm-dependent parameters and  $(\epsilon_1, \epsilon_2, \dots, \epsilon_m)$  represents the random variables used for incorporating the randomization in the algorithm. This mathematical representation can include all the nature-inspired/meta-heuristic algorithm listed in Fig. 6.


### 3.2. Particle swarm optimization (PSO)

PSO was given by Kennedy and Eberhart in 1995 [72,74]. The basic PSO was based on the simulation of the single directed, controlled motion of a swarm of flying birds. Each of these birds is treated as particles which regulate their flying information by its own and neighbour's flying experience. In other words, it combines the self-experience with the social experience, hence it was a social behaviour simulator. Later on, several revised versions of PSO emerged in which additional parameters such as confidence factors ( $c_1, c_2$ ) and inertia weight ( $w$ ) were added [176,177]. A recent study on PSO and its taxonomy can be found in [178].

The initialization is random, and after that, several iterations are carried out with the particle velocity ( $v$ ) and position ( $x$ ) updated at the end of each iteration, as follows: Each particle (i.e. bird) is represented by a particle number  $i$ . Each particle possesses a position which is defined by coordinates in  $n$ -dimension space and velocity, which reflects their proximity to the optimal/best position. At first, the initialization is random, and after that, the particles are manipulated by several iterations carried

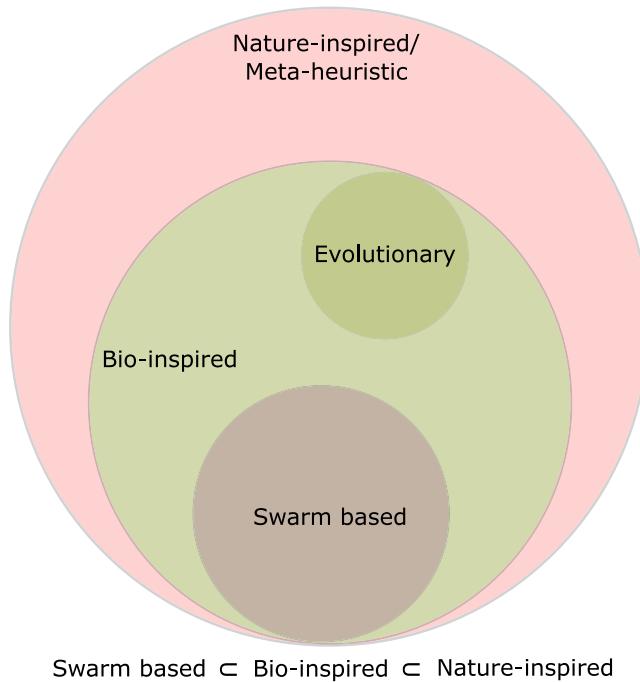

**Fig. 7.** Venn diagram for broad classification of optimization algorithm.

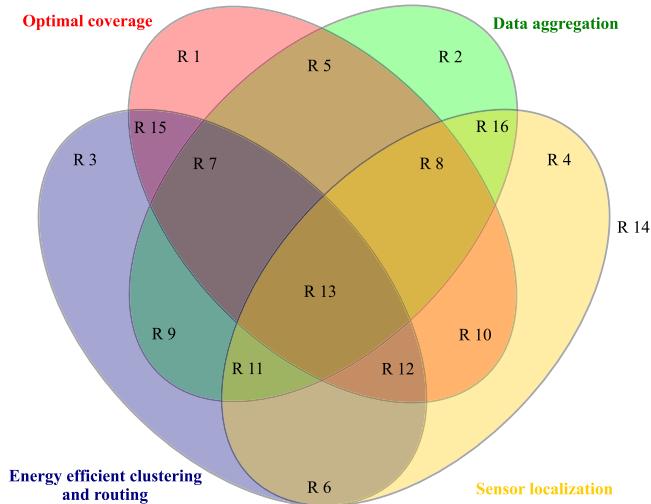

**Fig. 8.** Regions of application for various algorithm.

out with Eqs. (3) and (4) for position and velocity, respectively.

$$x^i(k+1) = x^i(k) + v^i(k+1) \quad (3)$$

$$v^i(k+1) = w^i v^i(k) + c_1 r_1 (x_{best}^i - x^i(k)) + c_2 r_2 (x_{gbest} - x^i(k)) \quad (4)$$

where;

$i = 1, 2, \dots, N_s$ ;  $N_s$  is the size of the swarm


$k = 1, 2, \dots, w^i$  = inertia weight for each particle  $i$

$x_{best}^i$  = best location of the particle

$x_{gbest}$  = best location amongst all the particle in swarm

$c_1$  = confidence factor which represents the private thinking of the particle itself; assigned to  $x_{best}^i$

$c_2$  = confidence factor which represents the collaboration among the particles; assigned to  $x_{gbest}$

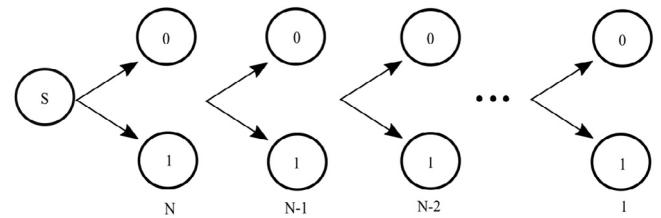

**Fig. 9.** BACA network.

$$r_1, r_2 = \text{random values between } [0, 1].$$

### 3.3. GA and adaptive GA (or IGA)

John H. Holland and his collaborators proposed the genetic algorithm in the 1960s and 1970s [39], and since then it has become one of the widely used meta-heuristic algorithms. It is based on the abstraction of Darwin's evolution principle of biological systems that has three components or genetic operators; reproduction–crossover–mutation. Every solution is encoded in a string (often decimal or binary) called chromosomes. The fitness function in every iteration calculates its value. Afterwards, these values are sorted in descending order. Solutions that are present at the top are considered as good solutions and selected for reproduction. It discards the solutions with low fitness values. After completion of reproduction, the selected solutions will go through crossover and mutation. The role of the crossover operator is to produce crossed solutions with optimal fitness values by the interchange of genetic material. The probability of this event is known as crossover probability, represented by  $P_c$ . This event is followed by mutation; which targets to find the unexplored genetic material with a probability known as mutation probability, represented by  $P_m$ . The computational equations for  $P_c$  and  $P_m$  is given by (5) and (6).

$$P_c = \begin{cases} \frac{k_1(f_{max}-f')}{f_{max}-f_{avg}} & f' > f_{avg} \\ k_3 & f' < f_{avg} \end{cases} \quad (5)$$

$$P_m = \begin{cases} \frac{k_2(f_{max}-f)}{f_{max}-f_{avg}} & f > f_{avg} \\ k_4 & f < f_{avg} \end{cases} \quad (6)$$

where  $f_{max}$  and  $f_{avg}$  represents the highest fitness and average fitness of the population respectively,  $f'$  represents the higher fitness amongst the two solutions that are selected for crossover and  $f$  represents the fitness of the solution that is selected for mutation. In order to restrict the values of  $P_c$  and  $P_m$  in the range  $[0, 1]$ , the values of the constants  $k_1, k_2, k_3$  and  $k_4$  should be less than 1. Also, the constants  $k_1$  and  $k_3$  should be greater than the  $k_2$  and  $k_4$ .

Adaptive GA (AGA) or Improved GA (IGA) is an enhanced version of conventional GA. In AGA,  $P_c$  and  $P_m$  changes adaptively based on different individuals condition that ultimately retard the possibility of premature convergence [179].

### 3.4. ACO and BACA

ACO is based on the food searching process by ants. In this process, the ant emits pheromone in the path. The remaining ants follow the path with a high intensity of pheromones [180, 181]. ACO estimates the optimal path through continuous accumulation and pheromones release process in several iterations. The performance of ACO depends strongly on the early stage pheromones. Lack of sufficient pheromones may result in premature convergence (*i.e.*, local optima) [182] and to avoid this, we

use BACA. A typical example of how BACA works is illustrated in Fig. 9. This binary coding increases the efficiency of the algorithm [182]. Different ants search the same routine and emit the pheromones on each edge. Out of the two binary edges, each ant selects one. This process can be represented in the form of a matrix with only  $(2 \times n)$ 's space. Defining a digraph  $G = (V, R)$  with  $V$  representing the node-set and  $R$  representing the path set.

$$\{ \{ v_0(c_s), v_1((c_N^0)), v_2((c_N^1)), v_3((c_{N-1}^0)), v_4((c_{N-1}^1)), \dots, \\ v_{2N-3}((c_2^0)), v_{2N-2}((c_2^1)), v_{2N-1}((c_1^0)), v_{2N}((c_1^1)) \} \} \quad (7)$$

In this digraph,  $c_s$  represent the staring node while  $c_j^0$  and  $c_j^1$  represents the value 0 and 1 of  $b_j$  bit used in the binary mapping.  $N$  is the encoding length (binary). For each node present in the node set, ( $j = 1, 2, 3, \dots, N$ ), there exist only two paths (0 and 1 states) which points towards  $c_{j-1}^0$  and  $c_{j-1}^1$  respectively [25]. Initially, it has been assumed that all the path have same piece information (equal to  $\tau_{i,j}(0) = C$ ;  $C$  is constant and  $\Delta\tau_{i,j}(0)(i, j = 1, 2, \dots, N)$ ). During the path deciding phase, the pheromones realized by  $k$  ( $k = 1, 2, 3, \dots, m$ ;  $m$  is the number of ants) ants and the probability of movement decides the direction. The probability of movement,  $p_{i,j}^k$ , is defined as

$$p_{i,j}^k = \frac{(\tau_{i,j}^\alpha(t) \cdot \eta_{i,j}^\beta(t))}{(\sum_{s \in \text{allowed}_k} \tau_{i,j}^\alpha(t) \cdot \eta_{i,j}^\beta(t))} \quad (8)$$

$k$  ants moves from point  $i$  to point  $j$ .  $\alpha$  and  $\beta$  are constants.  $\tau_{i,j}$  and  $\eta_{i,j}$  represents the unutilized information and visualness respectively in the  $(i, j)$  junction at  $t$  moment.  $\text{Allowed}_k = (0, 1)$  represents the upcoming status. With time, the pheromones evaporate resulting in loss of information.  $\rho$  is the perseverance factor and  $(1-\rho)$  represents the information loss factor. The  $\tau_{i,j}$  for the next moment is represented by

$$\tau_{i,j}(t+1) = \rho \cdot \tau_{i,j}(t) + \Delta\tau_{i,j} \quad (9)$$

$$\Delta\tau_{i,j} = \frac{1}{f_{\text{best}}(S)} \quad (10)$$

where,

$f_{\text{best}}(S)$  is the optimal cost. In a nutshell, BACA differs with the conventional ant colony only in the way the ant selects the path.

### 3.5. IGA with BACA

The combined meta-heuristic, IGA-BACA, searches for the optimal solution by initializing the BACA network with the final result of the IGA. Firstly the IGA is used to optimized the randomly generated solution. Now for the same time been, this optimized solution is feed to initialize the pheromones information of the BACA algorithm. The IGA-BACA algorithm terminates the loop once it meets the termination condition; otherwise, the complete process repeats itself to meet the termination condition (i.e., optimal updated pheromones).

### 3.6. LO

There are two types of lions; residents and nomads. Resident lions always live in groups called pride. In general, a pride of lion typically involves about five female along with their cubs of both sexes and one or more than one adult male. Young males, when getting sexually mature, get excluded from their birth pride. Nomads move either in pair or singularly. Pairing occurs among related males who have been excluded from their maternal pride. The lion may switch lifestyles means nomad at any time become a resident and vice versa [26].

Unlike that of cats, lions hunt together to catch their prey, which increases the probability of success of hunting. In case if a prey manages to escape then the new position of prey, PREY' is given by

$$\text{PREY}' = \text{PREY} + \text{rand}(0, 1) \cdot PI \cdot (\text{PREY} - \text{Hunter}) \quad (11)$$

where PREY represents the current position of prey, PI is the percentage of improvement in the fitness of hunter. The formulas are proposed to mimic encircling prey by the hunter group. The new positions, according to the location of prey, are generated as follows:

$$\text{Hunter}' = \begin{cases} \text{rand}(2 \cdot \text{PREY} - \text{Hunter}, \text{PREY}) & (2 \cdot \text{PREY} - \text{Hunter}) < \text{PREY} \\ \text{rand}(\text{PREY}, (2 \cdot \text{PREY} - \text{Hunter})) & (2 \cdot \text{PREY} - \text{Hunter}) > \text{PREY} \end{cases} \quad (12)$$

where Hunter is the current position of the hunter. And the new position for centre hunters is given as

$$\text{Hunter}' = \begin{cases} \text{rand}(\text{Hunter}, \text{PREY}) & \text{Hunter} < \text{PREY} \\ \text{rand}(\text{PREY}, \text{Hunter}) & \text{Hunter} > \text{PREY} \end{cases} \quad (13)$$

In Eqs. (12) and (13)  $\text{rand}(a, b)$ , generates a random number between  $a$  and  $b$ , where  $a$  and  $b$  are upper and lower bound respectively. A detail of the process involve in LO is mention in the pseudo code of the literature [26].

## 4. Solution to the problem domains and present status


In this section, we have presented a summary of the most prominent solutions to the problem domains of the WSNs based on some of the bio-inspired meta-heuristic algorithms, namely PSO, GA, and ACO.

### 4.1. Applications of PSO in WSNs

The centralized nature of PSO enables its application in the minimization of the coverage holes for near-optimal coverage in WSNs [78,183–190]. Data aggregation is a repetitive process, which makes it suitable for PSO [191–195]. PSO is suitable for selecting CH's with high energy in each round [196–200]. It also minimizes the sensor node localization errors [76,201,202]. A detailed chart, illustrating the PSO based solution, is presented in Fig. 10.

#### 4.1.1. For optimal coverage using PSO

Various studies have been reported to improve sensor coverage using PSO. Mendis et al. [189] used the conventional PSO for optimization of the mobile sink node location in WSNs. To deal with the various complexities and challenges in different applications, various modified or improved version of PSO are proposed in the literatures. Ngatchou et al. [185] used a modified version of PSO, namely sequential PSO for distributed sonar sensor placement. Sequential PSO is generally used for high dimension optimization and found application in underwater sensor deployment optimization. Further, Li et al. [186] also used a modified version of PSO, namely Particle Swarm Genetic Optimization (PSGO) for optimal sensor deployment. PSGO involve selection and mutation operator of GA, which eliminates the premature convergence issue of PSO. Afterwards, Wang et al. [187] proposed a virtual force directed co-evolutionary PSO (VFC-PSO) for dynamic sensor deployment in WSNs. Ab Aziz et al. [78] has proposed a novel optimization approach combining PSO and Voronoi diagram for sensor coverage problem in WSNs. This algorithm works efficiently for small Region of Interest (ROI) with a high number of sensor node or vice-versa. Subsequently, Hong and Shiu [188] used conventional PSO for searching the near-optimal Base Station (BS) location in WSNs. Hu et al. [184] proposed

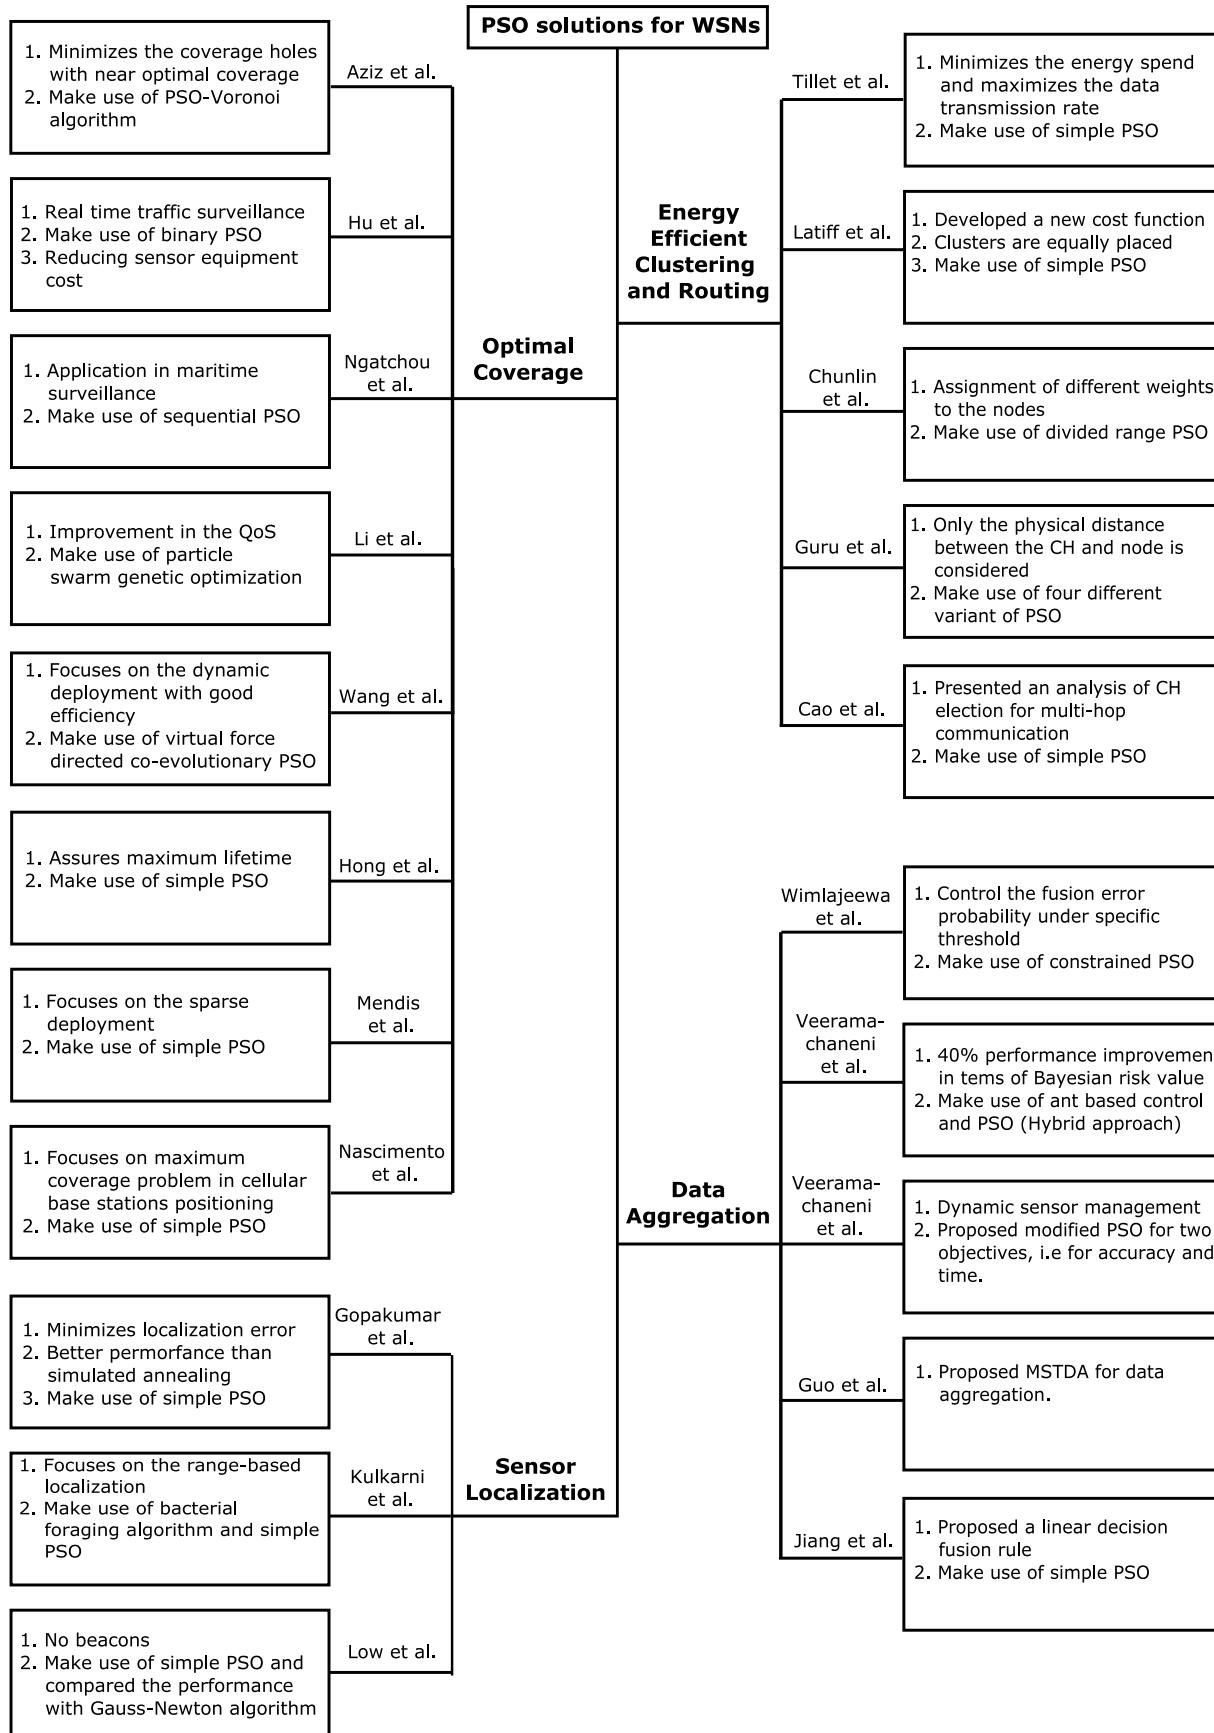**Fig. 10.** Summary of the PSO approaches/solutions to the problem domains in WSNs.

a methodology for optimal deployment of large radius sensors. They have used PSO for optimization of the sensor deployment in order to reduce the links in the proposed topology. Nascimento and Bastos-Filho [190] used the conventional PSO for BS positioning to avoid the overlapping between cells. Overall, various modified versions, including the conventional PSO, can be used for improving the sensor coverage.

#### 4.1.2. For sensor localization using PSO

For accurate node localization, Low et al. [202] used the conventional PSO. They have reported better accuracy when the results are compared with the Gauss–Newton algorithm. Similarly, Gopakumar et al. [76] used the same conventional PSO and reported better accuracy as compared with the simulated annealing approach. Later, Kulkarni et al. [201] presented a comprehensive study on node localization. They have compared the results of PSO and bacterial foraging algorithm. They reported that the node localization in WSNs is faster with PSO and more accurate with bacterial foraging algorithm.

#### 4.1.3. For energy efficient clustering and routing using PSO

Several studies have reported the use of PSO for energy-efficient clustering and routing. Tillett et al. [198] have used the conventional PSO for sensor node clustering in WSNs. They reported that the PSO outperforms simulated annealing and random search algorithm in terms of energy-efficient clustering. Afterwards, [200] proposed a divided range PSO algorithm for network clustering. They reported that the proposed algorithm is efficient when then mobile sensors are dense. Subsequently, Guru et al. [196] proposed four variants of PSO and applied it for energy-efficient clustering. They reported that the PSO with the supervisor–student model outperforms the other three algorithms. Cao et al. [197] have used a hybrid of graph theory and PSO algorithm for energy-efficient clustering in multi-hop WSNs. Latiff et al. [199] have used the conventional PSO for re-positioning of BS in a clustered WSNs. Overall, the use of PSO reduces energy consumption and extend the network lifetime.

#### 4.1.4. For data aggregation using PSO

Veeramachaneni and Osadciw [193] have used the conventional PSO for optimization of the accuracy and time from data aggregation aspect. In general, they have evaluated the potential of the PSO for multi-objective optimization. Further, Wimalajeewa and Jayaweera [191] have used the constrained PSO for optimal power allocation. Afterwards, Veeramachaneni and Osadciw [192] have used the hybrid version of PSO, namely ACO and PSO for dynamic sensor management. Guo et al. [194] proposed a multi-source temporal data aggregation algorithm (MSTDA) for data aggregation in WSNs. Subsequently, Jiang et al. [195] have used the constrained PSO with the penalty function concept, which increases the accuracy.

### 4.2. Applications of GA in WSNs

GA is proven to be good for random as well as deterministic deployment [25,38,203–206]. It is also good at finding lesser number of data aggregation points while routing the data to the base station [40,207–209]. It is used for pre-clustering which reduces the resultant communication distance [41,210–216]. Besides this, the global searching capability of the GA results into higher accuracy in locating the sensor nodes [43,217,218]. A detail chart, illustrating the GA based solution is presented in Fig. 11.

#### 4.2.1. For optimal coverage using GA

Various studies have evaluated the potential of GA for network coverage optimization. Konstantinidis et al. [204] have

modelled the sensor deployment and power assignment as a multi-objective problem and used the conventional GA for the optimization. Poe and Schmitt [206] proposed an approach for sensor deployment over a large WSNs. They make use of conventional GA. They have compared and reported the pros and cons of three different types of deployment. Bhondekar et al. [205] have used the conventional GA for node deployment in a fixed WSNs. Jia et al. [203] proposed an energy-efficient novel network coverage approach using conventional GA. They reported that the proposed approach results in balanced performance with high network coverage rate. Tian et al. [25] have used a hybrid version of GA called Improved GA and Binary ACO Algorithm (IGA-BACA) for optimal coverage in WSNs and compared there results with conventional GA. They reported that IGA-BACA outperforms conventional GA. They also reported a high coverage rate. Recently, Singh et al. [38] have used the same IGA-BACA and conventional GA for optimal coverage in WSNs with reduced sensing of redundant information.

#### 4.2.2. For sensor localization using GA

Jegede and Ferens [217] have used the conventional GA for node localization in WSNs. Recently, Peng and Li [43] have used DV-Hop GA based algorithm for node localization WSNs. They reported that the DV-Hop GA based algorithm outperforms the previously proposed algorithm. More recently, Tan et al. [218] have proposed Distance Mapping Algorithm (DMA) and integrate this with the GA for accurate node localization in WSNs. They reported that the proposed algorithm outperforms previously proposed algorithms in terms of accuracy and energy consumption.

#### 4.2.3. For energy efficient clustering and routing using GA


Jin et al. [210] proposed a sensor network optimization framework for Bari et al. [214] have used the conventional GA algorithm for energy-efficient clustering and routing in a two-tier sensor network. They have reported that the proposed approach shows significant improvement compared to the earlier proposed schemes. Seo et al. [212] proposed a hybrid GA algorithm, namely Location-Aware 2-D GA (LA2D-GA) for efficient clustering in WSNs. They reported that the LA2D outperform its 1-D version. Hussain and Islam [211] proposed an energy-efficient clustering and routing scheme based on conventional GA. Further, Luo [216] proposed the first quantum GA based QoS routing protocol for WSNs. Also, EkbataniFard et al. [215] proposed a multi-objective GA for energy-efficient QoS routing approach in WSNs. They reported that the proposed approach successfully reduces the average power consumption by efficient optimization of the network parameters. Norouzi et al. [213] proposed a dynamic clustering algorithm for WSNs based on conventional GA.

#### 4.2.4. For data aggregation using GA

Islam et al. [40] have proposed an energy-efficient balanced data aggregation tree algorithm based on GA. They reported that the spanning tree-based proposed algorithm improves the network lifetime significantly. Al-Karaki et al. [207] have proposed a grid-based data aggregation and routing scheme for WSNs. They reported that the proposed scheme reduces power consumption and improves network lifetime. Similar to the Islam et al. [40], Dabbaghian et al. [209] proposed an energy-efficient balanced data aggregation using spanning tree and GA. They also, reported an increase in the network lifetime. However, an improved version of spanning tree-based data aggregation algorithm is proposed by Norouzi et al. [208]. They use the residual energy of the nodes to further improve the network lifetime.

		<b>GA solutions for WSNs</b>	
		<b>Optimal Coverage</b>	<b>Energy Efficient Clustering and Routing</b>
Singh et al.	Konstantinidis et al.		
1. Minimizes the sensing of redundant information 2. Make use of Improved GA (IGA) along with Binary Ant Colony Optimization (BACA)	1. Investigated the Multi-objective Deployment and Power Assignment Problem (DPAP) 2. Make use of simple GA		1. Minimizes the communication distance in the sensor network via clustering. 2. Make use of simple GA
1. Obtained the optimal coverage using hybrid algorithm 2. Make use of Improved GA (IGA) along with Binary Ant Colony Optimization (BACA)	Tian et al.		Hussain et al. 1. Proposed energy efficient clusters for routing in WSNs 2. Investigated the gradual energy depletion 3. Make use of simple GA
1. Proposed Energy-efficient Coverage Control Algorithm (ECCA) 2. Make use of simple GA	Jia et al.		Bari et al. 1. Improved the parameters of the fitness function. 2. Obtained the optimum number of cluster using GA 3. Make use of simple GA
1. Proposed a methodology for self organizing in WSNs 2. Fitness function incorporates WSNs parameters	Bhonekar et al.		Seo et al. 1. Obtained the optimal cluster formation using GA 2. Proposed a Location-Aware Two Dimensional GA (LA2D-GA) algorithm 3. Make use of simple GA
1. Investigated node deployment (both random and deterministic) for large scale WSNs 2. Make use of simple GA	Poe et al.		Norouzi et al. 1. Proposed a mathematical formula, that increases the coverage against lifetime 2. Make use of simple GA
1. Proposed a new sensor node localization algorithm called Distance Mapping Algorithm 2. Make use of simple GA	Tan et al.		EkbataniFard et al. 1. Considered two-tiered WSNs 2. Reduces the average power consumption i.e. increases network lifetime 3. Make use of simple GA
1. Proposed a simulation based model in MATLAB for node localization detection using three anchors 2. Make use of simple GA	Jegede et al.		Luo et al. 1. Proposed an algorithm called as Quantum GA (QGA)-based QoS Routing Protocol 2. Efficient with best effort traffic 3. Make use of simple GA
1. Proposed an improved DV-Hop algorithm to improve localization accuracy 2. Make use of simple GA	Peng et al.		Islam et al. 1. Proposed a balanced and energy efficient data aggregation spanning tree for WSNs 2. Make use of simple GA
			Al-Karaki et al. 1. Maximizes the network lifetime by data aggregation and in-network processing techniques 2. Make use of simple GA
			Norouzi et al. 1. Increases the network lifetime by balancing the data load throughout the network 2. Make use of simple GA
			Dabbaghian et al. 1. Transmitting data from random node to the base station consumes lowest energy for optimal solution 2. Make use of simple GA

**Fig. 11.** Summary of the GA approaches/solutions to the problem domains in WSNs.

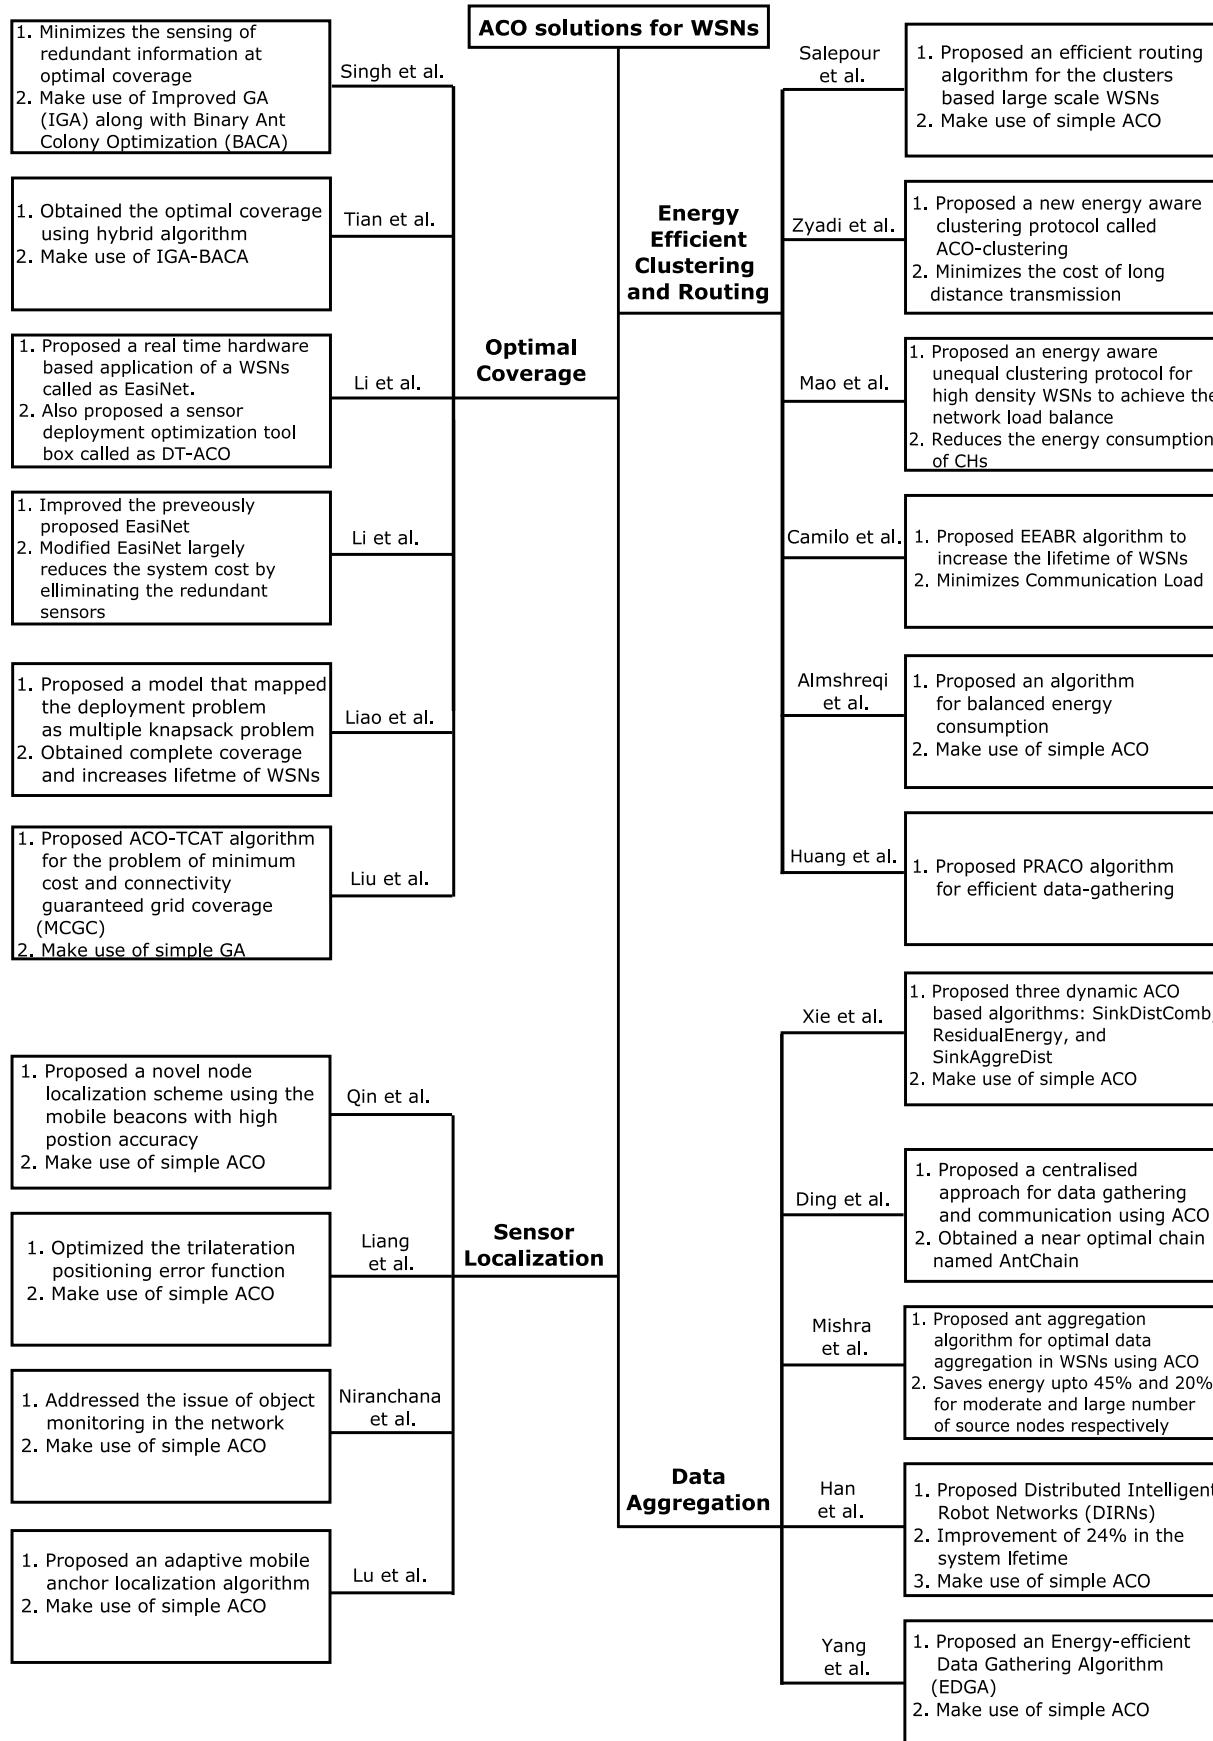**Fig. 12.** Summary of the ACO approaches/solutions to the problem domains in WSNs.

### 4.3. Applications of ACO in WSNs

The distributed nature of ACO results in better dynamic deployment of the sensor node for near-optimal coverage [25,38, 219–222]. ACO performs better in case of large and dynamic WSNs [223–227]. It also increases the network lifetime [228–233]. Never the less it also increases the accuracy of the unknown node in WSNs [69,234–236]. A detail chart, illustrating the ACO based solution is presented in Fig. 12.

#### 4.3.1. For optimal coverage using ACO

Li et al. [219] have proposed an efficient sensor deployment optimization toolbox named as DT-ACO. Also, they have proposed a real-time hardware-based application for WSNs called EasiNet. Later, in Li et al. [220], they have modified the previously proposed EasiNet. This modification allows them to eliminate redundant sensors during sensor deployment. Liao et al. [221] have proposed an efficient approach for sensor deployment using ACO. They have formulated the deployment problem as multiple knapsack problem (MKP). They reported a complete network coverage with prolong network lifetime. Liu [222] proposed a novel approach for sensor deployment in WSNs using ACO with three ant transition concept. They report a high coverage rate. Recently, Tian et al. [25] have used the hybrid version of ACO, namely IGA-BACA. They reported a high network coverage rate with high network lifetime. More recently, Singh et al. [38] have used the IGA-BACA for reducing the sensing of the redundant information with optimal coverage.

#### 4.3.2. For sensor localization using ACO

Qin et al. [69] have proposed a novel node localization scheme using ACO through beacons signals. They reported a high localization accuracy with low power consumption. Niranchana and Dinesh [235] have proposed a node localization approach in which the prediction of the nodes is made through interval theory and relocation of the nodes are done through ACO. They also reported a high localization accuracy. Further, Liang et al. [234] have used the simple ACO for node localization in WSNs. They have optimized the trilateration positioning error function. They reported a higher-order localization accuracy compared to the previously proposed localization schemes. Recently, Lu and Zhang [236] have proposed an ACO based mobile anchor node localization scheme for WSNs.

#### 4.3.3. For energy efficient clustering and routing using ACO

Camilo et al. [228] have proposed a new routing algorithm for WSNs based on ACO. They reported a low communication load with low energy consumption. Further, Salehpour et al. [231] also proposed a new routing algorithm with two routing levels based on ACO. They reported a relatively low power consumption and more load balancing. Ziyadi et al. [232] proposed an energy-aware clustering protocol based on ACO clustering for WSNs. They reported an increase in the network lifetime. Later, Huang et al. [230] proposed a Prediction routing algorithm based on ACO. It was first of its kind. They reported various advantages such as low power consumption, increase in network lifetime, and high load balancing. Almshreqi et al. [229] proposed a self-optimization algorithm based on ACO for balance energy consumption in WSNs. They reported low energy consumption with reduced packet loss. Mao et al. [233] proposed a fuzzy-based unequal clustering algorithm. They have used ACO for energy-aware routing. They reported that the proposed algorithm outperforms various traditional algorithm such as LEACH.

#### 4.3.4. For data aggregation using ACO

Ding and Liu [223] proposed an efficient self-adaptive data aggregation algorithm for WSNs based on ACO. They reported that the proposed algorithm outperforms the benchmark algorithms such as LEACH and PEGASIS in terms of prolonging the network lifetime. Further, Misra and Mandal [224] proposed an approach for efficient data aggregation algorithm for WSNs. They reported that the proposed approach is energy-efficient. Han and Hong-xu [225] proposed a novel approach for multi-media data aggregation in wireless sensor and actor-network. They have compared the performance with the traditional methods such as MEGA and reported an improvement in the stability, accuracy and network lifetime. Yang et al. [226] proposed an energy-efficient data aggregation algorithm based on ACO for WSNs. They reported an improvement over network lifetime. Similarly, Xie and Shi [227] proposed a data aggregation approach for WSNs using ACO and reported an improvement over network lifetime.

PSO, GA and ACO well address all the four problem domains of WSNs. Also, some hybrid techniques emerge for the same. Every new attempted claimed to show improved results over the previous approaches. In continuation of that, we have introduced the LO to solve the issues in WSNs. Table 2, shows the current status of all the four prominent algorithms.

## 5. Optimal coverage using IGA-BACA and LO

Getting optimal coverage in WSN belongs to a multi-objective optimization problem. The existing sensors,  $N$ , is represented by set  $S = (s_1, s_2, \dots, s_i, \dots, s_N)$ . In this optimization problem, we aim to estimate a sensor set  $S'$ , which covers the monitoring area to the maximum with minimum working sensors. The function for maximum coverage and minimum sensors is  $f_1(S')$  and  $f_2(S')$ . Both these functions are conflicting in nature; undermining them both, the new objective function by changing it to a maximal objective function  $f(S')$  read as;

$$f(S') = (f_1(S'), f_2(S')) \quad (14)$$

The framework for obtaining the optimal coverage using IGA-BACA and LO is explained in the upcoming subsections.

### 5.1. Mapping from solution to coding space

The binary coding represents the position of the sensors in WSNs. The corresponding control vector is  $L = (l_1, l_2, \dots, l_i, \dots, l_N)$ .  $l_i$  can either have a value of zero or one which represents the inactive or active state of a sensor respectively. The initialization of nomad and pride in LO and gene of the chromosome in GA has one to one correlation with the selection of nodes. Fig. 13, shows a typical example of a control vector. The probability of the sensor to be an active sensor depends on the adaptation or objective function (Eq. (14)). Higher the value, the larger will be the probability.

### 5.2. Algorithm and process


For optimization Eq. (14), we have used IGA-BACA and LO. In IGA-BACA, we have four processes, namely reproduction, crossover, mutation and update pheromone process. In contrast, LO has three processes, namely, mating, sorting, and elimination.

In IGA-BACA, the first process reproduces new offspring depending on probability infraction to their fitness value. Afterwards, the new offspring are sorted based on their fitness values. The only offspring with high fitness values are retained, and others are discarded. This process ensures an increase in the average fitness of the colony. The only limitation associated with this process is that the number of possible varieties is lost. This

**Table 2**

Summary of the present status of the bio-inspired algorithms approach to the problem domains of WSNs.

Problem domains of WSNs and Optimization algorithms	PSO	GA	ACO	LO
Optimal coverage	Addressed	Addressed	Addressed	Addressed (in this paper)
Data aggregation	Addressed	Addressed	Addressed	Addressed
Energy efficient clustering and routing	Addressed	Addressed	Addressed	Addressed
Sensor localization	Addressed	Addressed	Addressed	Not Addressed

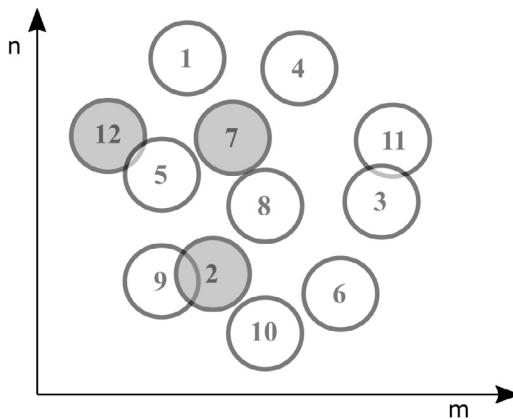

**Fig. 13.** Illustrating a control vector with 9 active sensors out of 12 is  $\{1\ 0\ 1\ 1\ 1\ 0\ 1\ 1\ 1\ 1\ 0\}$ . The dark circles represent the inactive sensors in the monitoring area. It is represented by a binary '0' in the control vector.

limitation is subsequently overcome by the crossover and mutation process. In the crossover process, a pair of offspring is selected based on the probability,  $P_c$ . This step further increases the probability that crossed solutions may produce offspring with high fitness value. Afterwards, the mutation process alters an offspring based on the probability,  $P_m$ . This step explores the unexplored genetic material. Lastly, the update pheromone process ( $(T_g)$ ; pheromones update operator) mapped the updated pheromone for an optimal offspring elected by the ant sequence. The ant release the pheromones in the optimal path traversed by them using Max-Min rule. We can calculate the probability of the update pheromone operator by

$$P\{T_g = x_i\} = \frac{f(x_i)}{\sum_{k=1}^N f(x_k)} \quad (15)$$

where,  $N$  is the number of offsprings. In LO, first mating with the best nomad, both male and female, is done followed by sorting nomad lions of both gender-based on fitness value. After which the nomad with least fitness value is eliminated. Analogous terms between the LO parameters and WSNs are listed in **Table 3**. The complete methodology for LO and IGA-BACA is illustrated in **Fig. 14**.

## 6. System model

As stated earlier, getting optimal coverage is one of the crucial problems associated with WSNs. The network should have maximum coverage with a certain level of QoS [237–239]. Presence of blind area significantly affects the QoS threshold and network coverage rate, ultimately affecting the network reliability. In order to increase network reliability, we can deploy more sensors in critical areas. Increasing sensors will increase the network cost. In this paper, we used the bio-inspired algorithms to find the optimal node-set.

In this study, we have assumed that the total monitoring area,  $A$ , is a two-dimensional plane and it is split into  $m \times n$  equal grids. After that, we have randomly distributed  $N$  no. of sensors

**Table 3**

Analogous mapping between LO algorithm and WSNs.

LO algorithm	Optimal coverage problem
Solution of a food source	Node distribution
$N$ dimensions in each solution	$N$ sensor coordinates
Fitness of the solution	Coverage rate in $A$
Maximum fitness	Optimum deployment

in the study area. Mathematically, these sensors are represented by  $S = (s_1, s_2, \dots, s_i, \dots, s_N)$ . All the sensors have effective radii (sensing radius) of  $r$  with a coordinate  $(x_i, y_i)$  for  $s_i$ .

In order to ensure maximum coverage, each grid in the monitoring area is considered as a target point. Mathematically, it is represented by  $A = (a_1, a_2, \dots, a_j, \dots, a_{mn})$ . If the target point  $a_j$  lies in the sensing region of sensor  $s_i$ , then the Euclidean distance between them is given by  $d(a_j, s_i) \leq r$  [25].

The probability,  $P_{cov}(x, y, s_i)$ , that any coordinate  $(x, y)$  in  $A$  is sensed by a sensor  $s_i(x_i, y_i)$  is given by

$$P_{cov}(x, y, s_i) = \begin{cases} 1 & (x - x_i)^2 + (y - y_i)^2 \leq r^2 \\ 0 & \text{otherwise} \end{cases} \quad (16)$$

The area covered by the sensors is given by

$$A_{area}(S) = \sum_{x=1}^m \sum_{y=1}^n P_{cov}(x, y, s_i) \Delta x \Delta y \quad (17)$$

If  $S'$  is the set of working or active sensors, then the fitness or objective function for the network coverage is given by

$$f_1(S') = A_{area}(S')/A_s \quad (18)$$

In contrast, the objective function for the node uses rate is given by

$$f_2(S') = |S'|/N \quad (19)$$

where  $N$  is the total number of sensor nodes. Eqs. (18) and (19) are combined to form a multi-objective optimization coverage problem given by.

$$\max f(S') = \max(f_1(S'), 1 - f_2(S')) \quad (20)$$

We have to maximize Eq. (20) to get maximum coverage with minimum sensor node.

## 7. Simulation results

The simulation parameters that we have used in this study is given in **Table 4**. We selected a monitoring area ( $A$ ) of  $100 \text{ m} \times 100 \text{ m}$  in which sensor nodes having a perception radius of  $10 \text{ m}$  ( $r = 10 \text{ m}$ ) are deployed. The constants  $k_1$ ,  $k_2$ ,  $k_3$ , and  $k_4$  are set to 1, 0.5, 1 and 0.5 respectively. These values restrict the range of  $P_c$  between 0.5 and 1 (i.e.,  $0.5 < P_c < 1$ ) and  $P_m$  between 0.001 and 0.05 (i.e.,  $0.001 < P_m < 0.05$ ). The moderately large range of  $P_c$  and small range of  $P_m$  is required for extensive recombination of solutions and prevention of the disruptions of the solutions respectively which ultimately prevents the algorithm from getting stuck into local optimum. The constant  $\alpha$  controls the pheromone importance, while  $\beta$  controls the distance priority. In general,  $\beta$  should be greater than  $\alpha$  for

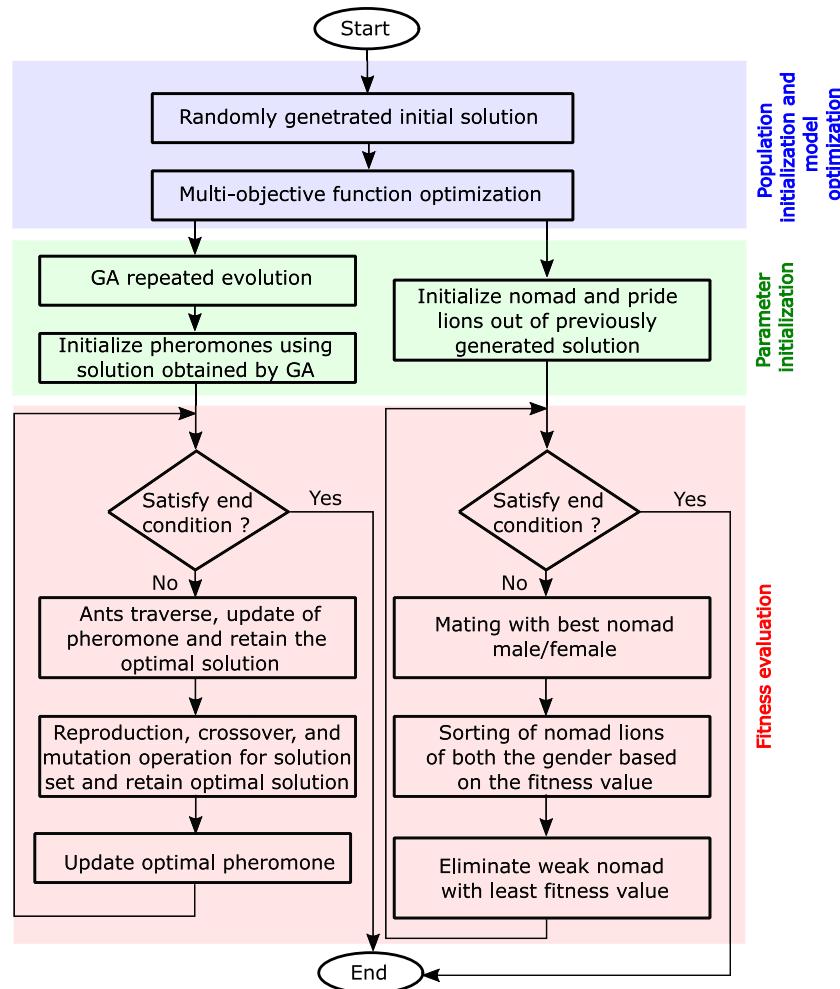


Fig. 14. Flowchart for IGA-BACA and LO.

**Table 4**  
Simulation parameters.

Parameter	Value
Monitoring area ( $A$ )	$100 \text{ m} \times 100 \text{ m}$
Perception radius ( $r$ )	10 m
$N$	100
$k_1 = k_3$	1
$k_2 = k_4$	0.5
$\alpha (\alpha \geq 1)$	1
$\beta (\beta \geq 1)$	6

the best results. Both these parameters are interlinked. We have to fix one and vary (iterate) the other to find the optimal set of value. In this study, we fixed the  $\alpha$  to 1 and found  $\beta$  to be 6.

We implemented the corresponding algorithm in MATLAB® (version 2017b). We iterated the IGA-BACA algorithm for 300 iterations. In doing so, we found that only 42 (out of 100) sensors cover the monitoring area optimally, as shown in Fig. 15. This optimal coverage is treated as a benchmark for further analysis. In contrast, while distributing these 100 sensors randomly, we found a network coverage map, as shown in Fig. 16. We randomly distribute these 100 sensors in the monitoring area, as shown in Fig. 16. Although the monitoring area is almost covered completely, there exist a significant amount of redundant nodes which senses redundant information. The uncovered area in the target monitoring area is considered as a coverage hole, and in Fig. 16, we can easily detect such coverage hole or blind areas

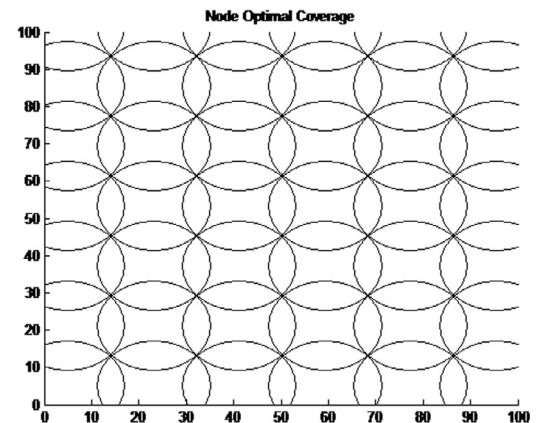


Fig. 15. Optimal network coverage.

(highlighted in red boxes). Hence, random network coverage is not usually adopted.

Network coverage using the IGA-BACA algorithm for 50, 100, 150, 200 iterations (or generations) is shown in Figs. 17–20. As we increase the number of iterations from 50 to 200, we found that the network coverage tends towards the optimal coverage; hence the number of redundant nodes decreases significantly. In

**Table 5**  
Simulation results for IGA-BACA and LO.

Iterations	IGA-BACA			LO		
	Network coverage rate (%)	Active sensor node	Time (s) (GPU)	Network coverage rate (%)	Active sensor node	Time (s) (GPU)
50	93.5	72	5	95.9	67	4
100	95.0	65	11	96.9	61	9
150	96.4	59	17	98.7	55	15
200	97.5	53	22	98.9	48	19
250	97.9	48	26	99.1	42	23

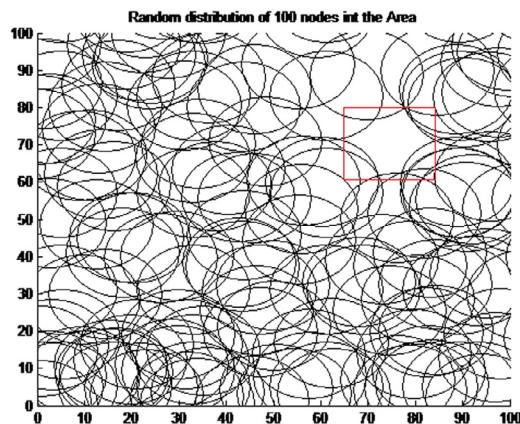


Fig. 16. Random distribution of 100 nodes.

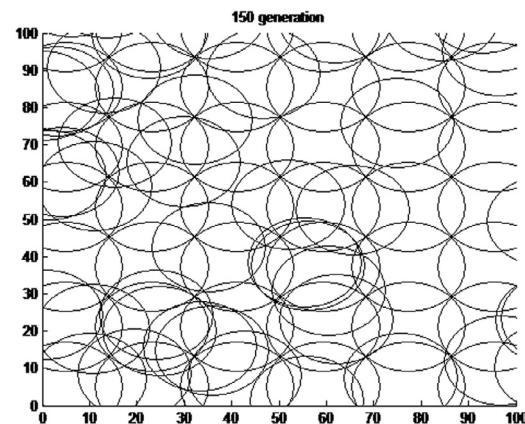


Fig. 19. 150 Generation of IGA-BACA.

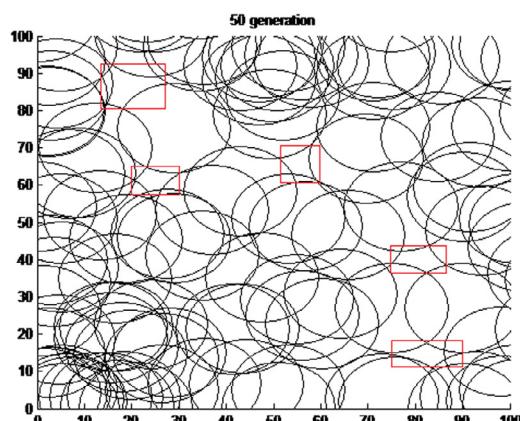


Fig. 17. 50 Generation of IGA-BACA.

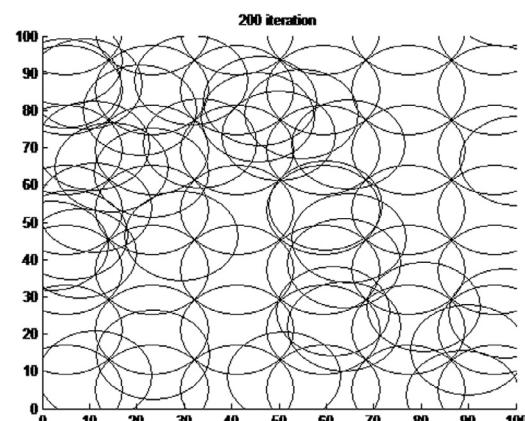


Fig. 20. 200 Generation of IGA-BACA.

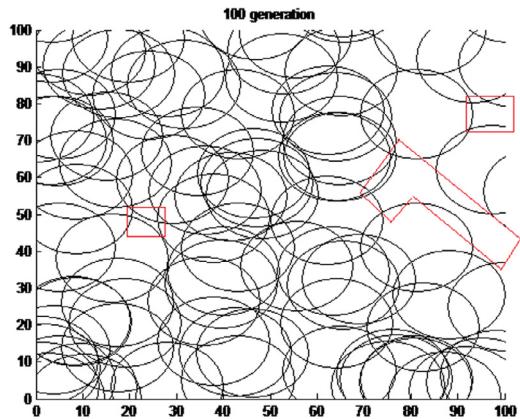


Fig. 18. 100 Generation of IGA-BACA.

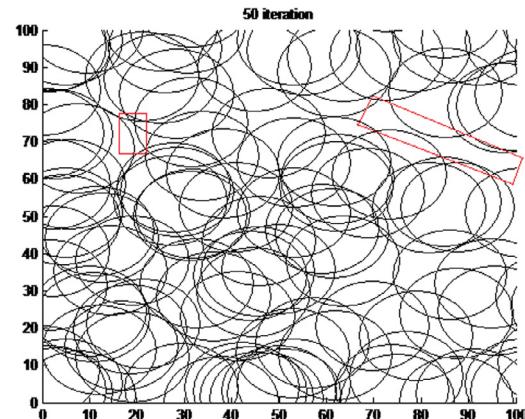


Fig. 21. 50 Generation of LO.

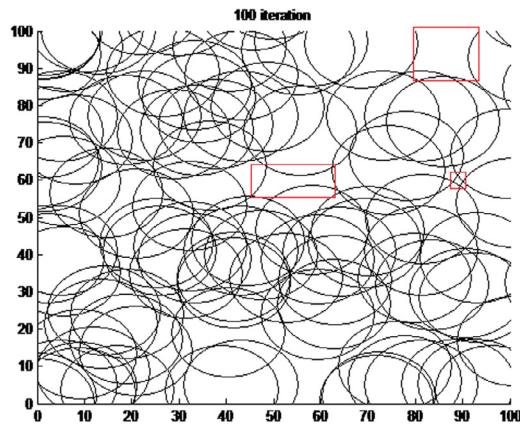


Fig. 22. 100 Generation of LO.

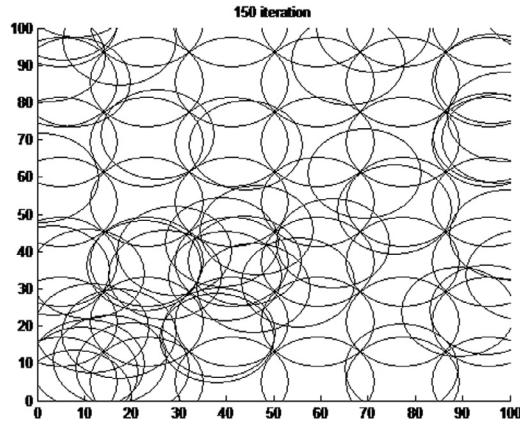


Fig. 23. 150 Generation of LO.

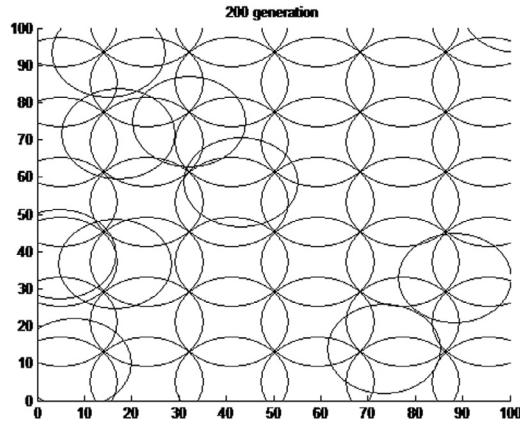


Fig. 24. 200 Generation of LO.

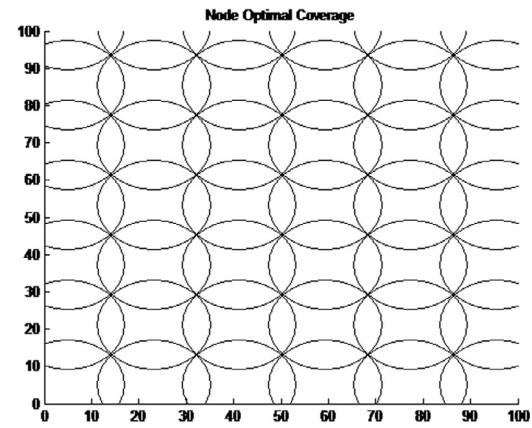


Fig. 25. 250 Generation of LO.

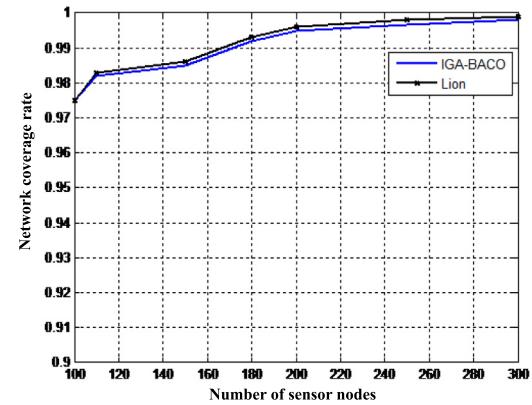


Fig. 26. Network coverage vs. sensor.

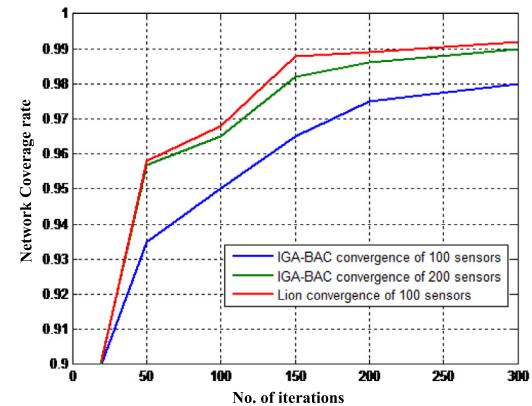


Fig. 27. Network coverage vs. generation.

comparison with the IGA-BACA derived results, the network coverage using LO algorithm for 50, 100, 150, 200 and 250 iterations is shown in Figs. 21–25. We found a similar trend of moving towards the optimal coverage with an increase in the number of iterations. For both the algorithms (*i.e.*, IGA-BACA and LO), we have tabulated the network coverage rate (in percentage), GPU processing time (in seconds) and the number of active sensors corresponding to 50, 100, 150, 200 and 250 iterations as shown in Table 5. We compared the results that are obtained through combined meta-heuristic IGA-BACA with the results obtained through

LO. In doing so, we observed that the optimal network coverage is obtained by both the approach. However, IGA-BACA algorithm requires approximately 300 iterations and LO algorithms require 250 iterations to achieve the optimal coverage. Also, in LO, the optimal coverage is obtained at a lesser number of sensors, as shown in Fig. 26. Further, LO has a faster rate of convergence which is primarily due to the presence of a large number of local maxima with higher values of fitness functions (Table 5). In addition to this, we plotted the network coverage rate against the number of iteration (Fig. 27). In doing so, we observed that the network coverage increases as the function of iteration. Also, the convergence of LO is better than IGA-BACA.

## 8. Conclusion

The use of nature-inspired algorithms has created a new era in next-generation computing. These algorithms are well suited for solving multi-objective optimization problems. Various features of nature-inspired algorithms such as reasonable computational time, find global optimal and applicability make them well suited for real-world optimization problems. In contrast, traditional algorithms generally fail to provide satisfactory results mainly because of the complexity and size of the problem structure. In this paper, we have presented a comprehensive review of such algorithms in context to various issues related to the WSNs.

We have evaluated the potential of two efficient metaheuristic approaches that compute the optimal coverage in WSNs, namely IGA-BACA and LO. We have compared the results of both these approaches. In doing so, we observed that as the number of iteration is increasing the network coverage rate tend towards optimal coverage. Also, the network coverage rate is faster in LO approach as compared to IGA-BACA. The optimal coverage is achieved with a lesser number of iteration in case of LO as compared with other approaches. It is due to the presence of a large number of local maxima with higher fitness value, and hence it is hardly any chance to miss local maxima. Although LO gives better performance than other optimization algorithms, still there is much scope to explore this algorithm and to apply it in multi-objective problems. For instance, if we can use machine learning approach such as Artificial Neural Network (ANN) that incorporates combined heuristic such as Ant Lion Optimization (ALO), IGA-BACA, etc. as our system inputs.

## CRediT authorship contribution statement

**Abhilash Singh:** Conceptualization, Methodology, Software, Data curation, Writing - original draft, Visualization, Investigation, Validation, Writing - review & editing. **Sandeep Sharma:** Conceptualization, Methodology, Software, Data curation, Writing - original draft, Visualization, Investigation, Supervision, Validation, Writing - review & editing. **Jitendra Singh:** Software, Validation, Writing - review & editing.

## Declaration of competing interest

The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

## Acknowledgements

We would like to acknowledge IISER Bhopal, Gautam Buddha University Greater Noida, and IIT Kanpur for providing institutional support. We thank to the editor and all the anonymous reviewers for providing helpful comments and suggestions.

## References

- [1] K. Sohrabi, J. Gao, V. Ailawadhi, G.J. Pottie, Protocols for self-organization of a wireless sensor network, *IEEE Pers. Commun.* 7 (5) (2000) 16–27.
- [2] A. Singh, V. Kotiyal, S. Sharma, J. Nagar, C.C. Lee, A machine learning approach to predict the average localisation error with applications to wireless sensor networks, *IEEE Access* 8 (2020) 208253–208263.
- [3] I.F. Akyildiz, W. Su, Y. Sankarasubramaniam, E. Cayirci, Wireless sensor networks: A survey, *Comput. Netw.* 38 (4) (2002) 393–422.
- [4] L. Borges, F.J. Velez, A.S. Lebres, Survey on the characterization and classification of wireless sensor network applications, *IEEE Commun. Surv. Tutor.* 16 (4) (2014) 1860–1890.
- [5] S. Lu, X. Huang, L. Cui, Z. Zhao, D. Li, Design and implementation of an ASIC-based sensor device for wsn applications, *IEEE Trans. Consum. Electron.* 55 (4) (2009) 1959–1967.
- [6] S. Sharma, J. Singh, R. Kumar, A. Singh, Throughput-save ratio optimization in wireless powered communication systems, in: 2017 International Conference on Information, Communication, Instrumentation and Control (ICICIC), 2017, pp. 1–6, <http://dx.doi.org/10.1109/ICOMICON.2017.8279031>.
- [7] R. Kumar, A. Singh, Throughput optimization for wireless information and power transfer in communication network, in: 2018 Conference on Signal Processing and Communication Engineering Systems (SPACES), 2018, pp. 1–5, <http://dx.doi.org/10.1109/SPACES.2018.8316303>.
- [8] J. Yick, B. Mukherjee, D. Ghosal, Wireless sensor network survey, *Comput. Netw.* 52 (12) (2008) 2292–2330.
- [9] M. Imran, H. Hasbullah, A.M. Said, Personality wireless sensor networks (pwsns), 2012, CoRR abs/1212.5543.
- [10] S. Sharma, R. Kumar, A. Singh, J. Singh, Wireless information and power transfer using single and multiple path relays, *Int. J. Commun. Syst.* 33 (14) (2020) e4464.
- [11] Y. Liang, H. Yu, Energy adaptive cluster-head selection for wireless sensor networks, in: Sixth International Conference on Parallel and Distributed Computing Applications and Technologies (PDCAT'05), 2005, pp. 634–638, <http://dx.doi.org/10.1109/PDCAT.2005.134>.
- [12] M. Cardei, D.-Z. Du, Improving wireless sensor network lifetime through power aware organization, *Wirel. Netw.* 11 (3) (2005) 333–340.
- [13] X. Wang, G. Xing, Y. Zhang, C. Lu, R. Pless, C. Gill, Integrated coverage and connectivity configuration in wireless sensor networks, in: Proceedings of the 1st International Conference on Embedded Networked Sensor Systems, in: SenSys '03, ACM, New York, NY, USA, 2003, pp. 28–39, <http://dx.doi.org/10.1145/958491.958496>, URL: <http://doi.acm.org/10.1145/958491.958496>.
- [14] C.-W. Tsai, T.-P. Hong, G.-N. Shiu, Metaheuristics for the lifetime of wsn: A review, *IEEE Sens. J.* 16 (9) (2016) 2812–2831.
- [15] S.J. Nanda, G. Panda, A survey on nature inspired metaheuristic algorithms for partitional clustering, *Swarm Evol. Comput.* 16 (2014) 1–18.
- [16] M. Iqbal, M. Naem, A. Anpalagan, A. Ahmed, M. Azam, Wireless sensor network optimization: Multi-objective paradigm, *Sensors* 15 (7) (2015) 17572–17620.
- [17] O. Demigha, W.-K. Hidouci, T. Ahmed, On energy efficiency in collaborative target tracking in wireless sensor network: A review, *IEEE Commun. Surv. Tutor.* 15 (3) (2012) 1210–1222.
- [18] R.V. Kulkarni, A. Forster, G.K. Venayagamoorthy, Computational intelligence in wireless sensor networks: A survey, *IEEE Commun. Surv. Tutor.* 13 (1) (2010) 68–96.
- [19] C.-W. Tsai, P.-W. Tsai, J.-S. Pan, H.-C. Chao, Metaheuristics for the deployment problem of wsn: A review, *Microprocess. Microsyst.* 39 (8) (2015) 1305–1317.
- [20] G. Molina, E. Alba, E.-G. Talbi, Optimal sensor network layout using multi-objective metaheuristics., *J. UCS* 14 (15) (2008) 2549–2565.
- [21] A.J. Al-Mousawi, Evolutionary intelligence in wireless sensor network: routing, clustering, localization and coverage, *Wirel. Netw.* 26 (8) (2019) 1–27.
- [22] J. Grefenstette, Optimization of control parameters for genetic algorithms, *IEEE Trans. Syst. Man Cybern.* 16 (1) (1986) 122–128.
- [23] Y. Sun, W. Dong, Y. Chen, An improved routing algorithm based on ant colony optimization in wireless sensor networks, *IEEE Commun. Lett.* 21 (6) (2017) 1317–1320.
- [24] A. Mehrotra, K.K. Singh, P. Khandelwal, An unsupervised change detection technique based on ant colony optimization, in: 2014 International Conference on Computing for Sustainable Global Development (INDIACOM), 2014, pp. 408–411, <http://dx.doi.org/10.1109/IndiaCom.2014.6828169>.
- [25] J. Tian, M. Gao, G. Ge, Wireless sensor network node optimal coverage based on improved genetic algorithm and binary ant colony algorithm, *EURASIP J. Wireless Commun. Networking* 2016 (1) (2016) 104.
- [26] M. Yazdani, F. Jolai, Lion optimization algorithm (loa): a nature-inspired metaheuristic algorithm, *J. Comput. Des. Eng.* 3 (1) (2016) 24–36.
- [27] G. Han, H. Xu, T.Q. Duong, J. Jiang, T. Hara, Localization algorithms of wireless sensor networks: a survey, *Telecommun. Syst.* 52 (4) (2013) 2419–2436.
- [28] B. Xing, W.-J. Gao, Innovative computational intelligence: a rough guide to 134 clever algorithms, in: Intelligent Systems Reference Library, Springer, 2014, pp. 1–451.
- [29] F. Campelo, C. Aranha, R. Koot, Evolutionary computation bestiary, 2019, URL: <https://github.com/fcampelo/EC-Bestiary> (accessed November 1, 2020).
- [30] A. Tzanetos, I. Fister Jr, G. Dounias, A comprehensive database of nature-inspired algorithms, *Data Brief* (2020) 105792.
- [31] F. Tao, Y. Laili, L. Zhang, Brief history and overview of intelligent optimization algorithms, in: Configurable Intelligent Optimization Algorithm, Springer, 2015, pp. 3–33.
- [32] D. Pham, D. Karaboga, Intelligent Optimisation Techniques: Genetic Algorithms, Tabu Search, Simulated Annealing and Neural Networks, Springer Science & Business Media, 2012.

- [33] J. Zhang, Z. Dong, A general intelligent optimization algorithm combination framework with application in economic load dispatch problems, *Energies* 12 (11) (2019) 2175.
- [34] D. Dasgupta, Z. Michalewicz, Evolutionary algorithms—an overview, in: *Evolutionary Algorithms in Engineering Applications*, Springer, 1997, pp. 3–28.
- [35] J. Kennedy, Swarm intelligence, in: *Handbook of Nature-Inspired and Innovative Computing*, Springer, 2006, pp. 187–219.
- [36] R.C. Eberhart, Y. Shi, J. Kennedy, *Swarm Intelligence*, Elsevier, 2001.
- [37] K. Das, D. Mishra, K. Shaw, A metaheuristic optimization framework for informative gene selection, *Inform. Med. Unlocked* 4 (2016) 10–20.
- [38] A. Singh, S. Sharma, J. Singh, R. Kumar, Mathematical modelling for reducing the sensing of redundant information in wsns based on biologically inspired techniques, *J. Intell. Fuzzy Systems* 37 (05) (2019) 1–11.
- [39] J.H. Holland, Adaptive algorithms for discovering and using general patterns in growing knowledge bases, *Int. J. Policy Anal. Inf. Syst.* 4 (3) (1980) 245–268.
- [40] O. Islam, S. Hussain, H. Zhang, Genetic algorithm for data aggregation trees in wireless sensor networks, in: 2007 3rd IET International Conference on Intelligent Environments, 2007, pp. 312–316.
- [41] S. Hussain, A.W. Matin, O. Islam, Genetic algorithm for energy efficient clusters in wireless sensor networks, in: Fourth International Conference on Information Technology (ITNG'07), IEEE, 2007, pp. 147–154.
- [42] Y. Yoon, Y.-H. Kim, An efficient genetic algorithm for maximum coverage deployment in wireless sensor networks, *IEEE Trans. Cybern.* 43 (5) (2013) 1473–1483.
- [43] B. Peng, L. Li, An improved localization algorithm based on genetic algorithm in wireless sensor networks, *Cogn. Neurodyn.* 9 (2) (2015) 249–256.
- [44] X. Yao, Y. Liu, G. Lin, Evolutionary programming made faster, *IEEE Trans. Evol. Comput.* 3 (2) (1999) 82–102.
- [45] W. Zhang, X. Yang, Q. Song, Improvement of dv-hop localization based on evolutionary programming resample, *J. Softw. Eng.* 9 (3) (2015) 631–640.
- [46] P.L. Lanzi, *Learning Classifier Systems: From Foundations to Applications*, Springer Science & Business Media, 2000.
- [47] J.R. Koza, *Genetic Programming*, Citeseer, 1997.
- [48] A. Tripathi, P. Gupta, A. Trivedi, R. Kala, Wireless sensor node placement using hybrid genetic programming and genetic algorithms, *Int. J. Intell. Inf. Technol. (IJIIT)* 7 (2) (2011) 63–83.
- [49] M. Aziz, M.-H. Tayarani-N, M.R. Meybodi, A two-objective memetic approach for the node localization problem in wireless sensor networks, *Genet. Program. Evol. Mach.* 17 (4) (2016) 321–358.
- [50] T. Bäck, D.B. Fogel, Z. Michalewicz, *Handbook of Evolutionary Computation*, CRC Press, 1997.
- [51] H. Fayyazi, M. Sabokrou, M. Hosseini, A. Sabokrou, Solving heterogeneous coverage problem in wireless multimedia sensor networks in a dynamic environment using evolutionary strategies, in: 2011 1st International EConference on Computer and Knowledge Engineering (ICCKE), IEEE, 2011, pp. 115–119.
- [52] S. Sivakumar, R. Venkatesan, Performance evaluation of hybrid evolutionary algorithms in minimizing localization error for wireless sensor networks, *J. Sci. Ind. Res.* 75 (5) (2016) 289–295.
- [53] H. Mühlensiepen, G. Paass, From recombination of genes to the estimation of distributions i. binary parameters, in: *International Conference on Parallel Problem Solving from Nature*, Springer, 1996, pp. 178–187.
- [54] Q. Zhang, A. Zhou, Y. Jin, Rm-med: A regularity model-based multiobjective estimation of distribution algorithm, *IEEE Trans. Evol. Comput.* 12 (1) (2008) 41–63.
- [55] X. Wang, H. Gao, J. Zeng, A copula-based estimation of distribution algorithms for coverage problem of wireless sensor network, *Sens. Lett.* 10 (8) (2012) 1892–1896.
- [56] F. Cequn, W. Shulei, Z. Sheng, Algorithm of distribution estimation for node localization in wireless sensor network, in: 2011 Seventh International Conference on Computational Intelligence and Security, IEEE, 2011, pp. 219–221.
- [57] A. Qin, V.L. Huang, P.N. Suganthan, Differential evolution algorithm with strategy adaptation for global numerical optimization, *IEEE Trans. Evol. Comput.* 13 (2) (2008) 398–417.
- [58] L. Cui, C. Xu, G. Li, Z. Ming, Y. Feng, N. Lu, A high accurate localization algorithm with dv-hop and differential evolution for wireless sensor network, *Appl. Soft Comput.* 68 (2018) 39–52.
- [59] I. Maleki, S.R. Khaze, M.M. Tabrizi, A. Bagherinia, A new approach for area coverage problem in wireless sensor networks with hybrid particle swarm optimization and differential evolution algorithms, *Int. J. Mob. Netw. Commun. Telemat. (IJMNT)* 3 (6) (2013) 61–76.
- [60] P. Kuila, P.K. Jana, A novel differential evolution based clustering algorithm for wireless sensor networks, *Appl. Soft Comput.* 25 (2014) 414–425.
- [61] A. Gupta, Y.-S. Ong, L. Feng, Multifactorial evolution: toward evolutionary multitasking, *IEEE Trans. Evol. Comput.* 20 (3) (2015) 343–357.
- [62] N.T. Tam, T.Q. Tuan, H.T.T. Binh, A. Swami, Multifactorial evolutionary optimization for maximizing data aggregation tree lifetime in wireless sensor networks, in: *Artificial Intelligence and Machine Learning for Multi-Domain Operations Applications II*, Vol. 11413, International Society for Optics and Photonics, 2020, p. 114130Z.
- [63] W. Dongrui, T. Xianfeng, Multi-tasking genetic algorithm (mtga) for fuzzy system optimization, *arxiv* (2019).
- [64] M. Dorigo, M. Birattari, *Ant Colony Optimization*, Springer, 2010.
- [65] M. Dorigo, C. Blum, Ant colony optimization theory: A survey, *Theor. Comput. Sci.* 344 (2–3) (2005) 243–278.
- [66] K. Socha, M. Dorigo, Ant colony optimization for continuous domains, *European J. Oper. Res.* 185 (3) (2008) 1155–1173.
- [67] C. Blum, Ant colony optimization: Introduction and recent trends, *Phys. Life Rev.* 2 (4) (2005) 353–373.
- [68] J. Yang, M. Xu, W. Zhao, B. Xu, A multipath routing protocol based on clustering and ant colony optimization for wireless sensor networks, *Sensors* 10 (5) (2010) 4521–4540.
- [69] F. Qin, C. Wei, L. Kezhong, Node localization with a mobile beacon based on ant colony algorithm in wireless sensor networks, in: 2010 International Conference on Communications and Mobile Computing, Vol. 3, IEEE, 2010, pp. 303–307.
- [70] W.-H. Liao, Y. Kao, C.-M. Fan, Data aggregation in wireless sensor networks using ant colony algorithm, *J. Netw. Comput. Appl.* 31 (4) (2008) 387–401.
- [71] X. Liu, D. He, Ant colony optimization with greedy migration mechanism for node deployment in wireless sensor networks, *J. Netw. Comput. Appl.* 39 (2014) 310–318.
- [72] R. Eberhart, J. Kennedy, Particle swarm optimization, in: *Proceedings of the IEEE International Conference on Neural Networks*, Vol. 4, Citeseer, 1995, pp. 1942–1948.
- [73] Y. Shi, R.C. Eberhart, Empirical study of particle swarm optimization, in: *Proceedings of the 1999 Congress on Evolutionary Computation-CEC99* (Cat. No. 99TH8406), Vol. 3, IEEE, 1999, pp. 1945–1950.
- [74] J. Kennedy, R. Eberhart, Particle swarm optimization (PSO), in: *Proc. IEEE International Conference on Neural Networks*, Perth, Australia, 1995, pp. 1942–1948.
- [75] J. Wang, Y. Cao, B. Li, H.-j. Kim, S. Lee, Particle swarm optimization based clustering algorithm with mobile sink for WSNs, *Future Gener. Comput. Syst.* 76 (2017) 452–457.
- [76] A. Gopakumar, Jacob, Lillykutty, Localization in wireless sensor networks using particle swarm optimization, in: 2008 IET International Conference on Wireless, Mobile and Multimedia Networks, IET, 2008, pp. 227–230.
- [77] Y. Lu, J. Chen, I. Comsa, P. Kuonen, B. Hirsbrunner, Construction of data aggregation tree for multi-objectives in wireless sensor networks through jump particle swarm optimization, *Procedia Comput. Sci.* 35 (2014) 73–82.
- [78] N.A.B. Ab Aziz, A.W. Mohammed, B. Sagar, Particle swarm optimization and voronoi diagram for wireless sensor networks coverage optimization, in: 2007 International Conference on Intelligent and Advanced Systems, IEEE, 2007, pp. 961–965.
- [79] K.M. Passino, Biomimicry of bacterial foraging for distributed optimization and control, *IEEE Control Syst. Mag.* 22 (3) (2002) 52–67.
- [80] S. Das, A. Biswas, S. Dasgupta, A. Abraham, Bacterial foraging optimization algorithm: theoretical foundations, analysis, and applications, in: *Foundations of Computational Intelligence* Vol. 3, Springer, 2009, pp. 23–55.
- [81] K.M. Passino, Bacterial foraging optimization, *Int. J. Swarm Intell. Res. (IJSIR)* 1 (1) (2010) 1–16.
- [82] S. Sribala, T. Virudhunagar, Energy efficient routing in wireless sensor networks using modified bacterial foraging algorithm, *Int. J. Res. Eng. Adv. Technol.* 1 (1) (2013) 1–5.
- [83] P. Nagchoudhury, S. Maheshwari, K. Choudhary, Optimal sensor nodes deployment method using bacteria foraging algorithm in wireless sensor networks, in: *Emerging ICT for Bridging the Future-Proceedings of the 49th Annual Convention of the Computer Society of India CSI Volume 2*, Springer, 2015, pp. 221–228.
- [84] G. Sharma, A. Kumar, Fuzzy logic based 3d localization in wireless sensor networks using invasive weed and bacterial foraging optimization, *Telecommun. Syst.* 67 (2) (2018) 149–162.
- [85] X. Li, J. Qian, Studies on artificial fish swarm optimization algorithm based on decomposition and coordination techniques, *J. Circuits Syst.* 1 (2003) 1–6.
- [86] X.-l. Li, F. Lu, G.-h. Tian, J.-x. Qian, Applications of artificial fish school algorithm in combinatorial optimization problems, *J. Shandong Univ. (Eng. Sci.)* 5 (2004) 015.
- [87] X. Song, C. Wang, J. Wang, B. Zhang, A hierarchical routing protocol based on afso algorithm for wsn, in: 2010 International Conference on Computer Design and Applications, 2, IEEE, 2010, pp. V2–635.
- [88] X. Yang, W. Zhang, Q. Song, A novel WSNs localization algorithm based on artificial fish swarm algorithm, *Int. J. Online Biomed. Eng. (iJOE)* 12 (01) (2016) 64–68.

- [89] W. Yiyue, L. Hongmei, H. Hengyang, Wireless sensor network deployment using an optimized artificial fish swarm algorithm, in: 2012 International Conference on Computer Science and Electronics Engineering, 2, IEEE, 2012, pp. 90–94.
- [90] D. Karaboga, B. Basturk, Artificial bee colony (ABC) optimization algorithm for solving constrained optimization problems, in: International Fuzzy Systems Association World Congress, Springer, 2007, pp. 789–798.
- [91] D. Karaboga, B. Akay, A comparative study of artificial bee colony algorithm, *Appl. Math. Comput.* 214 (1) (2009) 108–132.
- [92] D. Karaboga, B. Basturk, A powerful and efficient algorithm for numerical function optimization: artificial bee colony (abc) algorithm, *J. Glob. Optim.* 39 (3) (2007) 459–471.
- [93] D. Karaboga, C. Ozturk, A novel clustering approach: Artificial bee colony (abc) algorithm, *Appl. Soft Comput.* 11 (1) (2011) 652–657.
- [94] C. Öztürk, D. Karaboga, B. Görkemli, Artificial bee colony algorithm for dynamic deployment of wireless sensor networks, *Turk. J. Electr. Eng. Comput. Sci.* 20 (2) (2012) 255–262.
- [95] D. Karaboga, B. Basturk, On the performance of artificial bee colony (abc) algorithm, *Appl. Soft Comput.* 8 (1) (2008) 687–697.
- [96] V.R. Kulkarni, V. Desai, R.V. Kulkarni, Multistage localization in wireless sensor networks using artificial bee colony algorithm, in: 2016 IEEE Symposium Series on Computational Intelligence (SSCI), IEEE, 2016, pp. 1–8.
- [97] D. Karaboga, S. Okdem, C. Ozturk, Cluster based wireless sensor network routing using artificial bee colony algorithm, *Wirel. Netw.* 18 (7) (2012) 847–860.
- [98] P. Lucic, D. Teodorovic, Bee system: modeling combinatorial optimization transportation engineering problems by swarm intelligence, in: Preprints of the TRISTAN IV Triennial Symposium on Transportation Analysis, 2001, pp. 441–445.
- [99] P. Lučić, D. Teodorović, Vehicle routing problem with uncertain demand at nodes: the bee system and fuzzy logic approach, in: *Fuzzy Sets Based Heuristics for Optimization*, Springer, 2003, pp. 67–82.
- [100] D. Pham, A. Ghanbarzadeh, E. Koc, S. Otri, S. Rahim, M. Zaidi, *The Bees Algorithm*, Technical Note, Manufacturing Engineering Centre, Cardiff University, UK, 2005.
- [101] D.T. Pham, A. Ghanbarzadeh, E. Koç, S. Otri, S. Rahim, M. Zaidi, The bees algorithm—a novel tool for complex optimisation problems, in: *Intelligent Production Machines and Systems*, Elsevier, 2006, pp. 454–459.
- [102] A. Moussa, N. El-Sheimy, Localization of wireless sensor network using bees optimization algorithm, in: The 10th IEEE International Symposium on Signal Processing and Information Technology, IEEE, 2010, pp. 478–481.
- [103] X.-S. Yang, Engineering optimizations via nature-inspired virtual bee algorithms, in: *International Work-Conference on the Interplay Between Natural and Artificial Computation*, Springer, 2005, pp. 317–323.
- [104] X.-S. Yang, J.M. Lees, C.T. Morley, Application of virtual ant algorithms in the optimization of cfrp shear strengthened precracked structures, in: *International Conference on Computational Science*, Springer, 2006, pp. 834–837.
- [105] S.-C. Chu, P.-W. Tsai, J.-S. Pan, Cat swarm optimization, in: *Pacific Rim International Conference on Artificial Intelligence*, Springer, 2006, pp. 854–858.
- [106] S.-C. Chu, P.-W. Tsai, et al., Computational intelligence based on the behavior of cats, *Int. J. Innovative Comput. Inf. Control* 3 (1) (2007) 163–173.
- [107] S. Temel, N. Unaldi, O. Kaynak, On deployment of wireless sensors on 3-d terrains to maximize sensing coverage by utilizing cat swarm optimization with wavelet transform, *IEEE Trans. Syst. Man Cybern.: Syst.* 44 (1) (2013) 111–120.
- [108] L. Kong, C.-M. Chen, H.-C. Shih, C.-W. Lin, B.-Z. He, J.-S. Pan, An energy-aware routing protocol using cat swarm optimization for wireless sensor networks, in: *Advanced Technologies, Embedded and Multimedia for Human-Centric Computing*, Springer, 2014, pp. 311–318.
- [109] X.-S. Yang, S. Deb, S. Fong, Accelerated particle swarm optimization and support vector machine for business optimization and applications, in: *International Conference on Networked Digital Technologies*, Springer, 2011, pp. 53–66.
- [110] S. Su, J. Wang, W. Fan, X. Yin, Good lattice swarm algorithm for constrained engineering design optimization, in: 2007 International Conference on Wireless Communications, Networking and Mobile Computing, IEEE, 2007, pp. 6421–6424.
- [111] A. Mucherino, O. Seref, Monkey search: a novel metaheuristic search for global optimization, in: *AIP Conference Proceedings*, AIP, 2007, pp. 162–173.
- [112] T. Shankar, G. Eappen, S. Sahani, A. Rajesh, R. Mageshvaran, Integrated cuckoo and monkey search algorithm for energy efficient clustering in wireless sensor networks, in: 2019 Innovations in Power and Advanced Computing Technologies (I-PACT), Vol. 1, IEEE, 2019, pp. 1–4.
- [113] X.-S. Yang, Firefly algorithms for multimodal optimization, in: *International Symposium on Stochastic Algorithms*, Springer, 2009, pp. 169–178.
- [114] X.-S. Yang, S. Deb, Eagle strategy using Lévy walk and firefly algorithms for stochastic optimization, in: *Nature Inspired Cooperative Strategies for Optimization (NICSO 2010)*, Springer, 2010, pp. 101–111.
- [115] X.-S. Yang, Firefly algorithm, levy flights and global optimization, in: *Research and Development in Intelligent Systems XXVI*, Springer, 2010, pp. 209–218.
- [116] M.S. Manshahia, M. Dave, S. Singh, Firefly algorithm based clustering technique for wireless sensor networks, in: *2016 International Conference on Wireless Communications, Signal Processing and Networking (WiSPNET)*, IEEE, 2016, pp. 1273–1276.
- [117] E. Tuba, M. Tuba, M. Beko, Mobile wireless sensor networks coverage maximization by firefly algorithm, in: *2017 27th International Conference Radioelektronika (RADIOELEKTRONIKA)*, IEEE, 2017, pp. 1–5.
- [118] V.-O. Sai, C.-S. Shieh, T.-T. Nguyen, Y.-C. Lin, M.-F. Horng, Q.-D. Le, Parallel firefly algorithm for localization algorithm in wireless sensor network, in: *2015 Third International Conference on Robot, Vision and Signal Processing (RVSP)*, IEEE, 2015, pp. 300–305.
- [119] Y. Chu, H. Mi, H. Liao, Z. Ji, Q. Wu, A fast bacterial swarming algorithm for high-dimensional function optimization, in: *2008 IEEE Congress on Evolutionary Computation (IEEE World Congress on Computational Intelligence)*, IEEE, 2008, pp. 3135–3140.
- [120] T. Davidović, Bee colony optimization part i: The algorithm overview, *Yugosl. J. Oper. Res.* 25 (1) (2016).
- [121] S. Kumar, S. Kumar, Bee colony optimization for data aggregation in wireless sensor networks, in: *Proceedings of 3rd International Conference on Advanced Computing, Networking and Informatics*, Springer, 2016, pp. 239–246.
- [122] H. Drias, H. Mosteghanemi, Bees swarm optimization based approach for web information retrieval, in: *2010 IEEE/WIC/ACM International Conference on Web Intelligence and Intelligent Agent Technology*, Vol. 1, IEEE, 2010, pp. 6–13.
- [123] Y. Djenouri, H. Drias, Z. Habbas, H. Mosteghanemi, Bees swarm optimization for web association rule mining, in: *2012 IEEE/WIC/ACM International Conferences on Web Intelligence and Intelligent Agent Technology*, Vol. 3, IEEE, 2012, pp. 142–146.
- [124] F. Comellas, J. Martínez-Navarro, Bumblebees: a multiagent combinatorial optimization algorithm inspired by social insect behaviour, in: *Proceedings of the First ACM/SIGEVO Summit on Genetic and Evolutionary Computation*, ACM, 2009, pp. 811–814.
- [125] X.-S. Yang, S. Deb, Cuckoo search via Lévy flights, in: *2009 World Congress on Nature & Biologically Inspired Computing (NaBIC)*, IEEE, 2009, pp. 210–214.
- [126] X.-S. Yang, S. Deb, Multiobjective cuckoo search for design optimization, *Comput. Oper. Res.* 40 (6) (2013) 1616–1624.
- [127] X.-S. Yang, S. Deb, Cuckoo search: recent advances and applications, *Neural Comput. Appl.* 24 (1) (2014) 169–174.
- [128] S. Goyal, M.S. Patterh, Wireless sensor network localization based on cuckoo search algorithm, *Wirel. Pers. Commun.* 79 (1) (2014) 223–234.
- [129] M.A. Adnan, M. Razzaque, M.A. Abedin, S.S. Reza, M.R. Hussein, A novel cuckoo search based clustering algorithm for wireless sensor networks, in: *Advanced Computer and Communication Engineering Technology*, Springer, 2016, pp. 621–634.
- [130] M. Dhivya, M. Sundarambal, Cuckoo search for data gathering in wireless sensor networks, *Int. J. Mob. Commun.* 9 (6) (2011) 642–656.
- [131] H. Chen, Y. Zhu, K. Hu, X. He, Hierarchical swarm model: a new approach to optimization, *Discrete Dyn. Nat. Soc.* 2010 (2010).
- [132] S. Iordache, Consultant-guided search: a new metaheuristic for combinatorial optimization problems, in: *Proceedings of the 12th Annual Conference on Genetic and Evolutionary Computation*, ACM, 2010, pp. 225–232.
- [133] S. Iordache, Consultant-guided search algorithms for the quadratic assignment problem, in: *International Workshop on Hybrid Metaheuristics*, Springer, 2010, pp. 148–159.
- [134] S. Iordache, Consultant-guided search algorithms with local search for the traveling salesmen problem, in: *International Conference on Parallel Problem Solving from Nature*, Springer, 2010, pp. 81–90.
- [135] X.-S. Yang, A new metaheuristic bat-inspired algorithm, in: *Nature Inspired Cooperative Strategies for Optimization (NICSO 2010)*, Springer, 2010, pp. 65–74.
- [136] S.P. Kaur, M. Sharma, Radially optimized zone-divided energy-aware wireless sensor networks (wsn) protocol using ba (bat algorithm), *IETE J. Res.* 61 (2) (2015) 170–179.
- [137] C.K. Ng, C.H. Wu, W.H. Ip, K.L. Yung, A smart bat algorithm for wireless sensor network deployment in 3-d environment, *IEEE Commun. Lett.* 22 (10) (2018) 2120–2123.
- [138] S. Goyal, M.S. Patterh, Wireless sensor network localization based on bat algorithm, *Int. J. Emerg. Technol. Comput. Appl. Sci.* (2013).

- [139] R. Tang, S. Fong, X.-S. Yang, S. Deb, Wolf search algorithm with ephemeral memory, in: Seventh International Conference on Digital Information Management (ICDIM 2012), IEEE, 2012, pp. 165–172.
- [140] A.H. Gandomi, A.H. Alavi, Krill herd: a new bio-inspired optimization algorithm, *Commun. Nonlinear Sci. Numer. Simul.* 17 (12) (2012) 4831–4845.
- [141] M. Shopon, M.A. Adnan, M.F. Mridha, Krill herd based clustering algorithm for wireless sensor networks, in: 2016 International Workshop on Computational Intelligence (IWC), IEEE, 2016, pp. 96–100.
- [142] A. Andaliby, Dynamic Sensor Deployment in Mobile Wireless Sensor Networks Using Multi-Agent Krill Herd Algorithm (Ph.D. thesis), University of Victoria, 2018.
- [143] T. Ting, K.L. Man, S.-U. Guan, M. Nayel, K. Wan, Weightless swarm algorithm (wsa) for dynamic optimization problems, in: IFIP International Conference on Network and Parallel Computing, Springer, 2012, pp. 508–515.
- [144] X.-S. Yang, S. Deb, Two-stage eagle strategy with differential evolution, 2012, arXiv preprint arXiv:1203.6586.
- [145] S. Mirjalili, How effective is the grey wolf optimizer in training multi-layer perceptrons, *Appl. Intell.* 43 (1) (2015) 150–161.
- [146] S. Mirjalili, S.M. Mirjalili, A. Lewis, Grey wolf optimizer, *Adv. Eng. Softw.* 69 (2014) 46–61.
- [147] T.-K. Dao, Enhanced diversity herds grey wolf optimizer for optimal area coverage in wireless sensor networks, in: Genetic and Evolutionary Computing: Proceedings of the Tenth International Conference on Genetic and Evolutionary Computing, November 7–9, 2016 Fuzhou City, Fujian Province, China, 536, Springer, 2016, p. 174.
- [148] R. Rajakumar, J. Amudhavel, P. Dhavachelvan, T. Vengattaraman, Gwo-Ipwsn: Grey wolf optimization algorithm for node localization problem in wireless sensor networks, *J. Comput. Netw. Commun.* 2017 (2017).
- [149] N. Al-Aboudy, H. Al-Raweshidy, Grey wolf optimization-based energy-efficient routing protocol for heterogeneous wireless sensor networks, in: 2016 4th International Symposium on Computational and Business Intelligence (ISCBI), IEEE, 2016, pp. 101–107.
- [150] S. Mirjalili, The ant lion optimizer, *Adv. Eng. Softw.* 83 (2015) 80–98.
- [151] G. Yogarajan, T. Revathi, Improved cluster based data gathering using ant lion optimization in wireless sensor networks, *Wirel. Pers. Commun.* 98 (3) (2018) 2711–2731.
- [152] W. Liu, S. Yang, S. Sun, S. Wei, A node deployment optimization method of WSN based on ant-lion optimization algorithm, in: 2018 IEEE 4th International Symposium on Wireless Systems Within the International Conferences on Intelligent Data Acquisition and Advanced Computing Systems (IDAACS-SWS), IEEE, 2018, pp. 88–92.
- [153] M. Seyedali, Dragonfly algorithm: a new meta-heuristic optimization technique for solving single-objective, discrete, and multi-objective problems, *Neural Comput. Appl.* 27 (4) (2016) 1053–1073.
- [154] R. Vinodhini, C. Gomathy, A hybrid approach for energy efficient routing in wsn: Using da and gso algorithms, in: International Conference on Inventive Computation Technologies, Springer, 2019, pp. 506–522.
- [155] P.T. Daely, S.Y. Shin, Range based wireless node localization using dragonfly algorithm, in: 2016 Eighth International Conference on Ubiquitous and Future Networks (ICUFN), IEEE, 2016, pp. 1012–1015.
- [156] A. Askarzadeh, A novel metaheuristic method for solving constrained engineering optimization problems: crow search algorithm, *Comput. Struct.* 169 (2016) 1–12.
- [157] N. Mahesh, S. Vijayachitra, Decsa: hybrid dolphin echolocation and crow search optimization for cluster-based energy-aware routing in wsn, *Neural Comput. Appl.* 31 (1) (2019) 47–62.
- [158] D. Yuvaraj, M. Sivaram, A.M.U. Ahamed, S. Nageswari, An efficient lion optimization based cluster formation and energy management in WSN based IoT, in: International Conference on Intelligent Computing & Optimization, Springer, 2019, pp. 591–607.
- [159] S. Mirjalili, A. Lewis, The whale optimization algorithm, *Adv. Eng. Softw.* 95 (2016) 51–67.
- [160] R. Ozdag, M. Canayaz, A new dynamic deployment approach based on whale optimization algorithm in the optimization of coverage rates of wireless sensor networks, *European Journal of Technic* 7 (2) (2017).
- [161] F. Lang, J. Su, Z. Ye, X. Shi, F. Chen, A wireless sensor network location algorithm based on whale algorithm, in: 2019 10th IEEE International Conference on Intelligent Data Acquisition and Advanced Computing Systems: Technology and Applications (IDAACS), 1, IEEE, 2019, pp. 106–110.
- [162] A.R. Jadhav, T. Shankar, Whale optimization based energy-efficient cluster head selection algorithm for wireless sensor networks, 2017, arXiv preprint arXiv:1711.09389.
- [163] A. Ebrahimi, E. Khamehchi, Sperm whale algorithm: an effective meta-heuristic algorithm for production optimization problems, *J. Natl. Gas Sci. Eng.* 29 (2016) 211–222.
- [164] A. Fard, M. Hajigahaei-Keshteli, Red deer algorithm (rda): a new optimization algorithm inspired by red deers' mating, in: International Conference on Industrial Engineering, IEEE.,(2016 E), 2016, pp. 33–34.
- [165] S.Z. Mirjalili, S. Mirjalili, S. Saremi, H. Faris, I. Aljarah, Grasshopper optimization algorithm for multi-objective optimization problems, *Appl. Intell.* 48 (4) (2018) 805–820.
- [166] G. Dhiman, V. Kumar, Multi-objective spotted hyena optimizer: A multi-objective optimization algorithm for engineering problems, *Knowl.-Based Syst.* 150 (2018) 175–197.
- [167] S. Mirjalili, A.H. Gandomi, S.Z. Mirjalili, S. Saremi, H. Faris, S.M. Mirjalili, Salp swarm algorithm: A bio-inspired optimizer for engineering design problems, *Adv. Eng. Softw.* 114 (2017) 163–191.
- [168] H.M. Kanoosh, E.H. Houssein, M.M. Selim, Salp swarm algorithm for node localization in wireless sensor networks, *J. Comput. Netw. Commun.* 2019 (2019).
- [169] M.A. Syed, R. Syed, Weighted salp swarm algorithm and its applications towards optimal sensor deployment, *J. King Saud Univ.-Comput. Inf. Sci.* (2019).
- [170] L. Cheng, X.-h. Wu, Y. Wang, Artificial flora (af) optimization algorithm, *Appl. Sci.* 8 (3) (2018) 329.
- [171] M. Jain, V. Singh, A. Rani, A novel nature-inspired algorithm for optimization: Squirrel search algorithm, *Swarm Evol. Comput.* 44 (2019) 148–175.
- [172] A. Kaveh, A. Zaerreza, Shuffled shepherd optimization method: a new meta-heuristic algorithm, *Eng. Comput.* (2020).
- [173] Y. Zhang, Z. Jin, Group teaching optimization algorithm: A novel meta-heuristic method for solving global optimization problems, *Expert Syst. Appl.* 148 (2020) 113246.
- [174] X.-S. Yang, Z. Cui, R. Xiao, A.H. Gandomi, M. Karamanoglu, Swarm Intelligence and Bio-Inspired Computation: Theory and Applications, Elsevier, 2013.
- [175] X.-S. Yang, Nature-inspired optimization algorithms: challenges and open problems, *J. Comput. Sci.* (2020) 101104.
- [176] Y. Del Valle, G.K. Venayagamoorthy, S. Mohagheghi, J.-C. Hernandez, R.G. Harley, Particle swarm optimization: basic concepts, variants and applications in power systems, *IEEE Trans. Evol. Comput.* 12 (2) (2008) 171–195.
- [177] Y. Shi, R. Eberhart, A modified particle swarm optimizer, in: 1998 IEEE International Conference on Evolutionary Computation Proceedings. IEEE World Congress on Computational Intelligence (Cat. No. 98TH8360), IEEE, 1998, pp. 69–73.
- [178] A.A. Esmin, R.A. Coelho, S. Matwin, A review on particle swarm optimization algorithm and its variants to clustering high-dimensional data, *Artif. Intell. Rev.* 44 (1) (2015) 23–45.
- [179] S.K. Pal, P.P. Wang, Genetic Algorithms for Pattern Recognition, CRC press, 2017.
- [180] M. Wang, J. He, Y. Xue, Fault diagnosis based on ant colony optimal algorithm, *Int. J. Inf. Syst. Sci.* 1 (3–4) (2005) 329–338.
- [181] Y. Sun, J. Tian, Wsn path optimization based on fusion of improved ant colony algorithm and genetic algorithm, *J. Comput. Inf. Syst.* 6 (5) (2010) 1591–1599.
- [182] W. Xiong, L. Wang, C. Yan, Binary ant colony evolutionary algorithm, *Int. J. Inf. Technol.* 12 (3) (2006) 10–20.
- [183] N.A.B. Ab Aziz, A.W. Mohammed, M.Y. Alias, A wireless sensor network coverage optimization algorithm based on particle swarm optimization and voronoi diagram, in: 2009 International Conference on Networking, Sensing and Control, IEEE, 2009, pp. 602–607.
- [184] J. Hu, J. Song, M. Zhang, X. Kang, Topology optimization for urban traffic sensor network, *Tsinghua Sci. Technol.* 13 (2) (2008) 229–236.
- [185] P.N. Ngatchou, W.L. Fox, M.A. El-Sharkawi, Distributed sensor placement with sequential particle swarm optimization, in: Proceedings 2005 IEEE Swarm Intelligence Symposium, 2005. SIS 2005., IEEE, 2005, pp. 385–388.
- [186] J. Li, K. Li, W. Zhu, Improving sensing coverage of wireless sensor networks by employing mobile robots, in: 2007 IEEE International Conference on Robotics and Biomimetics (ROBIO), IEEE, 2007, pp. 899–903.
- [187] X. Wang, S. Wang, J.-J. Ma, An improved co-evolutionary particle swarm optimization for wireless sensor networks with dynamic deployment, *Sensors* 7 (3) (2007) 354–370.
- [188] T.-P. Hong, G.-N. Shiu, Allocating multiple base stations under general power consumption by the particle swarm optimization, in: 2007 IEEE Swarm Intelligence Symposium, IEEE, 2007, pp. 23–28.
- [189] C. Mendis, S.M. Guru, S. Halgamuge, S. Fernando, Optimized sink node path using particle swarm optimization, in: 20th International Conference on Advanced Information Networking and Applications-Volume 1 (AINA'06), 2, IEEE, 2006, pp. 5–pp.
- [190] A.I. Nascimento, C.J. Bastos-Filho, A particle swarm optimization based approach for the maximum coverage problem in cellular base stations positioning, in: 2010 10th International Conference on Hybrid Intelligent Systems, IEEE, 2010, pp. 91–96.
- [191] T. Wimalajeewa, S.K. Jayaweera, Optimal power scheduling for correlated data fusion in wireless sensor networks via constrained pso, *IEEE Trans. Wireless Commun.* 7 (9) (2008) 3608–3618.

- [192] K. Veeramachaneni, L. Osadciw, Swarm intelligence based optimization and control of decentralized serial sensor networks, in: 2008 IEEE Swarm Intelligence Symposium, IEEE, 2008, pp. 1–8.
- [193] K.K. Veeramachaneni, L.A. Osadciw, Dynamic sensor management using multi-objective particle swarm optimizer, in: Multisensor, Multisource Information Fusion: Architectures, Algorithms, and Applications 2004, 5434, International Society for Optics and Photonics, 2004, pp. 205–216.
- [194] W. Guo, N. Xiong, A.V. Vasilakos, G. Chen, H. Cheng, Multi-source temporal data aggregation in wireless sensor networks, *Wirel. Pers. Commun.* 56 (3) (2011) 359–370.
- [195] S. Jiang, Z. Zhao, S. Mou, Z. Wu, Y. Luo, Linear decision fusion under the control of constrained pso for wsns, *Int. J. Distrib. Sens. Netw.* 8 (1) (2012) 871596.
- [196] S. Guru, S. Halgamuge, S. Fernando, Particle swarm optimisers for cluster formation in wireless sensor networks, in: 2005 International Conference on Intelligent Sensors, Sensor Networks and Information Processing, IEEE, 2005, pp. 319–324.
- [197] X. Cao, H. Zhang, J. Shi, G. Cui, Cluster heads election analysis for multi-hop wireless sensor networks based on weighted graph and particle swarm optimization, in: 2008 Fourth International Conference on Natural Computation, 7, IEEE, 2008, pp. 599–603.
- [198] J.C. Tillett, R.M. Rao, F. Sahin, T. Rao, Particle swarm optimization for the clustering of wireless sensors, in: Digital Wireless Communications V, Vol. 5100, International Society for Optics and Photonics, 2003, pp. 73–83.
- [199] N.A.A. Latiff, N.M. Abdullatif, R.B. Ahmad, Extending wireless sensor network lifetime with base station repositioning, in: 2011 IEEE Symposium on Industrial Electronics and Applications, IEEE, 2011, pp. 241–246.
- [200] C. Ji, Y. Zhang, S. Gao, P. Yuan, Z. Li, Particle swarm optimization for mobile ad hoc networks clustering, in: IEEE International Conference on Networking, Sensing and Control, 2004, 1, IEEE, 2004, pp. 372–375.
- [201] R.V. Kulkarni, G.K. Venayagamoorthy, M.X. Cheng, Bio-inspired node localization in wireless sensor networks, in: 2009 IEEE International Conference on Systems, Man and Cybernetics, IEEE, 2009, pp. 205–210.
- [202] K. Low, H. Nguyen, H. Guo, A particle swarm optimization approach for the localization of a wireless sensor network, in: 2008 IEEE International Symposium on Industrial Electronics, IEEE, 2008, pp. 1820–1825.
- [203] J. Jia, J. Chen, G. Chang, Z. Tan, Energy efficient coverage control in wireless sensor networks based on multi-objective genetic algorithm, *Comput. Math. Appl.* 57 (11–12) (2009) 1756–1766.
- [204] A. Konstantinidis, K. Yang, Q. Zhang, An evolutionary algorithm to a multi-objective deployment and power assignment problem in wireless sensor networks, in: IEEE GLOBECOM 2008–2008 IEEE Global Telecommunications Conference, IEEE, 2008, pp. 1–6.
- [205] A.P. Bhondekar, R. Vig, M.L. Singla, C. Ghanshyam, P. Kapur, Genetic algorithm based node placement methodology for wireless sensor networks, in: Proceedings of the International Multiconference of Engineers and Computer Scientists, Vol. 1, 2009, pp. 18–20.
- [206] W.Y. Poe, J.B. Schmitt, Node deployment in large wireless sensor networks: coverage, energy consumption, and worst-case delay, in: Asian Internet Engineering Conference, ACM, 2009, pp. 77–84.
- [207] J.N. Al-Karaki, R. Ul-Mustafa, A.E. Kamal, Data aggregation and routing in wireless sensor networks: Optimal and heuristic algorithms, *Comput. Netw.* 53 (7) (2009) 945–960.
- [208] A. Norouzi, F.S. Babamir, Z. Orman, A tree based data aggregation scheme for wireless sensor networks using ga, *Wirel. Sens. Netw.* 4 (08) (2012) 191.
- [209] M. Dabbaghian, A. Kalanaki, H. Taghvaei, F.S. Babamir, S.M. Babamir, Data aggregation trees based algorithm using genetic algorithm in wireless sensor networks, *Int. J. Comput. Netw. Secur.* 2 (87) (2010).
- [210] S. Jin, M. Zhou, A.S. Wu, Sensor network optimization using a genetic algorithm, in: Proceedings of the 7th World Multiconference on Systemics, Cybernetics and Informatics, 2003, pp. 109–116.
- [211] S. Hussain, O. Islam, Genetic algorithm for energy-efficient trees in wireless sensor networks, in: Advanced Intelligent Environments, Springer, 2009, pp. 139–173.
- [212] H.-S. Seo, S.-J. Oh, C.-W. Lee, Evolutionary genetic algorithm for efficient clustering of wireless sensor networks, in: 2009 6th IEEE Consumer Communications and Networking Conference, IEEE, 2009, pp. 1–5.
- [213] A. Norouzi, F.S. Babamir, A.H. Zaim, A new clustering protocol for wireless sensor networks using genetic algorithm approach, *Wirel. Sens. Netw.* 3 (11) (2011) 362.
- [214] A. Bari, S. Wazed, A. Jaekel, S. Bandyopadhyay, A genetic algorithm based approach for energy efficient routing in two-tiered sensor networks, *Ad Hoc Netw.* 7 (4) (2009) 665–676.
- [215] G.H. EkbatiFard, R. Monsefi, M.-R. Akbarzadeh-T, M.H. Yaghmaee, A multi-objective genetic algorithm based approach for energy efficient qos-routing in two-tiered wireless sensor networks, in: IEEE 5th International Symposium on Wireless Pervasive Computing 2010, IEEE, 2010, pp. 80–85.
- [216] W. Luo, A quantum genetic algorithm based qos routing protocol for wireless sensor networks, in: 2010 IEEE International Conference on Software Engineering and Service Sciences, IEEE, 2010, pp. 37–40.
- [217] O.D. Jegede, K. Ferens, A genetic algorithm for node localization in wireless sensor networks, in: The 2013 World Congress in Computer Science, Computer Engineering, and Applied Computing (WORLDCOMP'13), 2013, pp. 22–25.
- [218] R. Tan, Y. Li, Y. Shao, W. Si, Distance mapping algorithm for sensor node localization in wsns, *Int. J. Wirel. Inf. Netw.* (2019) 1–10.
- [219] D. Li, W. Liu, Z. Zhao, L. Cui, Demonstration of a wsn application in relic protection and an optimized system deployment tool, in: 2008 International Conference on Information Processing in Sensor Networks (Ipsn 2008), IEEE, 2008, pp. 541–542.
- [220] D. Li, W. Liu, L. Cui, Easidesign: an improved ant colony algorithm for sensor deployment in real sensor network system, in: 2010 IEEE Global Telecommunications Conference GLOBECOM 2010, IEEE, 2010, pp. 1–5.
- [221] W.-H. Liao, Y. Kao, R.-T. Wu, Ant colony optimization based sensor deployment protocol for wireless sensor networks, *Expert Syst. Appl.* 38 (6) (2011) 6599–6605.
- [222] X. Liu, Sensor deployment of wireless sensor networks based on ant colony optimization with three classes of ant transitions, *IEEE Commun. Lett.* 16 (10) (2012) 1604–1607.
- [223] N. Ding, P.X. Liu, Data gathering communication in wireless sensor networks using ant colony optimization, in: 2004 IEEE International Conference on Robotics and Biomimetics, IEEE, 2004, pp. 822–827.
- [224] R. Misra, C. Mandal, Ant-aggregation: ant colony algorithm for optimal data aggregation in wireless sensor networks, in: 2006 IFIP International Conference on Wireless and Optical Communications Networks, IEEE, 2006, pp. 5–pp.
- [225] X. Han, M. Hong-xu, Maximum lifetime data aggregation in distributed intelligent robot network based on aco, in: 2008 IEEE Congress on Evolutionary Computation (IEEE World Congress on Computational Intelligence), IEEE, 2008, pp. 50–55.
- [226] J. Yang, Z. Li, Y. Lin, W. Zhao, A novel energy-efficient data gathering algorithm for wireless sensor networks, in: 2010 8th World Congress on Intelligent Control and Automation, IEEE, 2010, pp. 7016–7020.
- [227] M. Xie, H. Shi, Ant-colony optimization based in-network data aggregation in wireless sensor networks, in: 2012 12th International Symposium on Pervasive Systems, Algorithms and Networks, IEEE, 2012, pp. 77–83.
- [228] T. Camilo, C. Carreto, J.S. Silva, F. Boavida, An energy-efficient ant-based routing algorithm for wireless sensor networks, in: International Workshop on Ant Colony Optimization and Swarm Intelligence, Springer, 2006, pp. 49–59.
- [229] A.M.S. Almsheeqi, B.M. Ali, M.F.A. Rasid, A. Ismail, P. Varahram, An improved routing mechanism using bio-inspired for energy balancing in wireless sensor networks, in: The International Conference on Information Network 2012, IEEE, 2012, pp. 150–153.
- [230] R. Huang, Z. Chen, G. Xu, Energy-aware routing algorithm in wsn using predication-mode, in: 2010 International Conference on Communications, Circuits and Systems (ICCCAS), IEEE, 2010, pp. 103–107.
- [231] A.-A. Salehpour, B. Mirmobin, A. Afzali-Kusha, S. Mohammadi, An energy efficient routing protocol for cluster-based wireless sensor networks using ant colony optimization, in: 2008 International Conference on Innovations in Information Technology, IEEE, 2008, pp. 455–459.
- [232] M. Ziyadi, K. Yasami, B. Abolhassani, Adaptive clustering for energy efficient wireless sensor networks based on ant colony optimization, in: 2009 Seventh Annual Communication Networks and Services Research Conference, IEEE, 2009, pp. 330–334.
- [233] S. Mao, C. Zhao, Z. Zhou, Y. Ye, An improved fuzzy unequal clustering algorithm for wireless sensor network, *Mob. Netw. Appl.* 18 (2) (2013) 206–214.
- [234] M.-Y. Liang, L. Li, K. Chen, Wireless sensor network nodes localization method of undergroundbased on ant colony algorithm, *Meikuang Jixie(Coal Mine Mach.)* 31 (12) (2010) 48–50.
- [235] S. Niranchana, E. Dinesh, Object monitoring by prediction and localisation of nodes by using ant colony optimization in sensor networks, in: 2012 Fourth International Conference on Advanced Computing (ICOAC), IEEE, 2012, pp. 1–8.
- [236] Y.H. Lu, M. Zhang, Adaptive mobile anchor localization algorithm based on ant colony optimization in wireless sensor networks, *Int. J. Smart Sens. Intell. Syst.* 7 (4) (2014).
- [237] H.M. Ammari, On the problem of k-coverage in mission-oriented mobile wireless sensor networks, *Comput. Netw.* 56 (7) (2012) 1935–1950.
- [238] W. Chen, S. Chen, D. Li, Minimum-delay POIs coverage in mobile wireless sensor networks, *EURASIP J. Wireless Commun. Networking* 2013 (1) (2013) 262.
- [239] A. Boukerche, P. Sun, Connectivity and coverage based protocols for wireless sensor networks, *Ad Hoc Netw.* 80 (2018) 54–69.